



**UPDATE**

**DIGITUS®**

# NETWORK & IT COMPONENTS

SURVEILLANCE & A/V SOLUTIONS





**Die Marke DIGITUS®**

Die Marke DIGITUS® wurde 1994 eingeführt und ist damit seit über 20 Jahren mit einer umfangreichen Produktpalette aus den Bereichen Sicherheit und Überwachung, Video Distribution, Computer Components sowie Kabel und Adapter auf dem Weltmarkt vertreten.

Die Produkte der Marke werden insbesondere von technisch versierten und interessierten Konsumenten genutzt und für das gute Preis-Leistungsverhältnis der Produkte geschätzt.

Die DIGITUS® Produkte werden in über **50 Ländern vertrieben**. Produktion und Vertrieb unterliegen der regelmäßigen Kontrolle und sind nach aktuellen Standards **zertifiziert**.

Die Auswahl der **benutzerfreundlichen** und **zuverlässigen** DIGITUS® Produkte orientiert sich grundlegend an aktuellen Marktentwicklungen.

Für anspruchsvolle Anforderungen der IT-Infrastruktur bietet das Produkt Portfolio zudem, neben Schranksystemen und Kabeln, Stromversorgung von Rechenzentren, Anschluss- und Verteilersysteme für Glas- und Kupferkomponenten, vorkonfektionierte Glasfaserstrecken und entsprechende Messtechnik.

**The DIGITUS® brand**

The DIGITUS® brand was launched in 1994 and has hence been available on the global market for over 20 years with a comprehensive product range covering the areas of security and surveillance, video distribution and computer components, as well as cables and adapters.

The products of the brand are in particular used by technically adept and interested consumers and esteemed for their good price-benefit ratio.

DIGITUS® products are **sold in over 50 countries**. Their production and distribution are subject to regular controls and certified in keeping with current standards.

The selection of **user-friendly** and **dependable** DIGITUS® products is principally based on current developments in the market.

For IT infrastructures with challenging requirements, the product portfolio also offers power supply of computer centers, connection and distribution systems for glass and copper components, ready-made glass fiber lines and the corresponding measurement equipment, besides cabinet systems and cables.



---

# DIGITUS®

# PRODUCT UPDATES

---

## **COMPUTER ACCESSORIES & COMPONENTS ..... 4 - 16**

USB 3.0 TYPE C Multiport Adapters .....	6
USB 3.0 TYPE C Hubs .....	7
USB 3.0 TYPE C Network Adapters .....	8
USB 3.0 TYPE C Graphic Adapters .....	8 - 10
I/O Cards, TYPE C .....	11
I/O Cards, Firewire .....	11
External SSD / HDD Enclosures .....	12 - 13
External SSD / HDD Adapters .....	13 - 14
SSD / HDD Installation Frames .....	15
Wireless LAN & Network Adapters .....	16

## **PRESENTATION SOLUTIONS ..... 18 - 35**

HDMI Splitter, Ultra HD 4K .....	20 - 22
HDMI Splitter .....	23
HDMI Switches, Ultra HD 4K .....	24 - 28
Audio Extractor & Converter .....	30
Audio Switches .....	31
POE Ethernet Switches .....	32 - 34
Video Server .....	35

## **MONITOR / TV STANDS AND WALL MOUNTS ..... 36 - 48**

## **CABLES ..... 50 - 56**

HDMI Cables.....	52
DisplayPort Cables .....	52
VGA Cables.....	53
DVI Cables.....	53
USB 2.0 Cables .....	54
USB 3.0 Cables .....	54
USB Type-C™ Cables.....	55
Patch Cables .....	55
Power Cables .....	55
Audio Cables .....	56
Apple Cables .....	56

**COMPUTER ACCESSORIES  
& COMPONENTS**





### **USB Typ C - der neue Standard der USB-Stecker der Zukunft**

Der USB Typ C Stecker erleichtert in vielerlei Hinsicht die Handhabung von Kabeln. Der Anschluss ist reversibel einsteckbar und unterstützt neben der reinen Datenübertragung auch die Stromversorgung bis zu 100W. Das bedeutet, dass man nicht mehr darauf achten muss, in welcher Richtung man das Kabel in den Anschluss einstecken muss, sondern man kann den Anschluss wenden und von beiden Seiten einstecken.

Geräte wie z.B. das Macbook ist eines der ersten Laptops, welche mit Typ C Stecker ausgestattet sind und gleichzeitig Dank der sogenannte Power Delivery Function (PD) geladen werden kann.

Da sich dieser Anschluss bei mehr und mehr Endgeräten im Bereich der Computer, Tablets und Smartphones durchsetzen wird, sind Sie mit unserem DIGITUS® Zubehör bestens gerüstet.

### **USB Type C – The new standart USB plug of the future**

The USB C plug makes handling your cables way easier. The new Typ C standart allows you not only to plug in your cable reversible, but it also supports next to the datatransfer, powerdelivery with up to 100W. This means you not only have to not look out which way around to insert your cable, but also that you will need less different cables.

The Macbook is one of the first devices equipped with a Type C connector for charging (PD) and datatransfer and a milestone for many more devices like laptops, tablets and smartphones to come.

With DIGITUS® you find a range of many Type C converters and adapters for all your needs



**MORE COMPUTER ACCESSORIES & COMPONENTS  
IN OUR MAIN CATALOG, PAGES 68 - 141.**



### DIGITUS® USB 3.0 Typ C VGA Multiport Adapter

- **Universeller USB Grafik Adapter mit VGA Ausgang**
- **Inklusive 1 USB 3.0 Port**
- **Mit Ladefunktion über den Typ C Port**
- **Full HD Auflösung bei 75Hz**
- **Für alle Betriebssysteme; Windows, Mac und Google Chrome**

#### Technical Features

- USB 3.0 multi-adaptor with Type C port
- Full HD resolution (1920x1080) at 75 Hz
- USB 3.0 port
- USB Type C port with Power Delivery function
- High-quality aluminium housing

### DIGITUS® USB 3.0 Type C VGA Multiport Adaptor

- **Universal USB graphic adaptor with VGA output**
- **Includes one USB 3.0 port**
- **With PD function via the Type C port**
- **Full HD resolution at 75 Hz**
- **For all operating systems: Windows, Mac, and Google Chrome**

- Chipset: VL100/VL210/IT6513
- Cable length: 20 cm
- Size: 51 x 80 x 14 mm
- Weight: 112 g



DA-70839 385981 | USB 3.0 Type C Multiport Adaptor



### DIGITUS® USB 3.0 Typ C HDMI Multiport Adapter

- **Universeller USB Grafik Adapter mit HDMI Ausgang**
- **Inklusive 1 USB 3.0 Port**
- **Ultra full HD Auflösung mit 3840x2160 Pixel bei 30HZ für optimalen Sehgenuss**
- **Mit Ladefunktion über den Typ C Port**
- **Für alle Betriebssysteme; Windows, Mac und Google Chrome**

#### Technical Features

- USB 3.0 multi-adaptor with Type C port
- Ultra Full HD resolution (3840x2160) at 30 Hz for optimal viewing pleasure
- USB 3.0 port
- USB Type C port with Power Delivery function

### DIGITUS® USB 3.0 Type C HDMI Multiport Adaptor

- **Universal USB graphic adaptor with HDMI output**
- **Includes one USB 3.0 port**
- **Ultra Full HD resolution (3840x2160) at 30 Hz for optimal viewing pleasure**
- **With PD function via the Type C port**
- **For all operating systems: Windows, Mac, and Google Chrome**

- High-quality aluminium housing
- Chipsatz: VL100/PS176/VL210
- Cable length: 20 cm
- Size: 51 x 58 x 11 mm
- Weight: 63 g



DA-70838 385974 | USB 3.0 Type C Multiport Adaptor

### DIGITUS® USB 3.0 3 port HUB mit Typ C Ladefunktion

- 3 Port USB 3.0 HUB mit Typ C Ladeport (PD)
- Elegantes Aluminiumgehäuse
- Unterstützt Datenübertragungen mit bis zu 5 Gbps
- Abwärtskompatibel mit USB 2.0 und 1.1
- Kompatibel mit Mac OS, Windows 10 und Google Chrome OS

#### Technical Features

- 3-port USB 3.0 hub with Type C PD function
- USB 3.0 super speed port (5 Gbps)
- Downward compatible with USB 2.0 and 1.1
- Compatible with Mac OS, Windows 10, and Google Chrome OS

### DIGITUS® USB 3.0 3-Port Hub with Type C Power Delivery Function

- 3-port USB 3.0 hub with Type C PD function
- Elegant aluminum housing
- Supports data transfer rates up to 5 Gbps
- Downward compatible with USB 2.0 and 1.1
- Compatible with Mac OS, Windows 10, and Google Chrome OS

- Cable length: 10 cm
- Size: 92x31x15mm
- Weight: 78g



DA-70242 386018 | USB 3.0 3-Port Hub with Type C Power Delivery (PD) Function

### DIGITUS® USB 2.0 3-Port Hub & Fast Ethernet LAN-Adapter mit Typ C Anschluss

- Universeller USB 2.0 Multiadapter mit Typ C Port
- Drei USB 2.0 Anschlüsse
- RJ45 Fast Ethernet Netzwerk Anschluss
- Für alle Betriebssysteme; Windows, Mac und Google Chrome

#### Technical Features

- Universal USB multi-adapter with Type C connector
- Three USB 2.0 ports
- RJ45 Fast Ethernet connector (10/100 Mbps)
- High-quality aluminium housing
- Cable length: 20 cm

### DIGITUS® USB 2.0 3-Port Hub & Fast Ethernet LAN Adaptor with Type C Connector

- Universal USB multi-adapter with Type C connector
- Three USB 2.0 ports
- RJ45 Fast Ethernet network connector
- For all operating systems: Windows, Mac, and Google Chrome

- Chipset: FE1.1S/RTL8152B
- Size: 84 x 24 x 17 mm
- Weight: 25 g



DA-70253 385998 | USB 2.0 3-Port Hub & Fast Ethernet LAN Adaptor with Type C Connector

### DIGITUS® USB 3.0 Typ C Gigabit Ethernet Adapter



- **USB 3.0 Typ C Gigabit Ethernet Adapter**
- **Dank der USB 3.0 Schnittstelle können Sie im Gegensatz zu USB 2.0 die volle Geschwindigkeit von bis zu 1000Mbit/s erreichen**
- **Für alle Betriebssysteme; Windows, Mac und Google Chrome**

Technical Features

- USB 3.0 Type C Gigabit Ethernet adaptor
- RJ 45 Gigabit Ethernet connector (10/100/1000 Mbps)
- High-quality aluminium housing

### DIGITUS® USB 3.0 Type C Gigabit Ethernet adaptor

- **USB 3.0 Type C Gigabit Ethernet adaptor**
- **Unlike USB 2.0, USB 3.0 ports allows you to enjoy full 1000 Mbps data transfer speeds.**
- **For all operating systems: Windows, Mac, and Google Chrome**

- Cable length: 20 cm
- Chipset: RTL8153
- Dimensions: 64 x 24 x 17 mm
- Weight: 21 g



DN-3024 386001 | USB 3.0 Type C Gigabit Ethernet adaptor

### DIGITUS® USB 3.0 Typ C 1080p VGA Grafik Adapter



- **Universeller USB Grafik Adapter mit VGA Ausgang**
- **Full HD Auflösung bei 75Hz**
- **Für alle Betriebssysteme; Windows, Mac und Google Chrome**

Technical Features

- USB 3.0 adaptor with Type C port
- Full HD resolution (1920x1080) at 75 Hz
- Chipset: VL100 + PS176
- High-quality aluminium housing

### DIGITUS® USB 3.0 Type C 1080p VGA Graphic Adaptor

- **Universal USB graphic adaptor with VGA output**
- **Full HD resolution at 75 Hz**
- **For all operating systems: Windows, Mac, and Google Chrome**

- Cable length: 20 cm
- Size: 46 x 37.6 x 13.2 mm
- Weight: 45 g



DA-70837 385967 | USB 3.0 Type C 1080p VGA Graphic Adaptor

### DIGITUS® USB 3.0 Typ C 4K HDMI Grafik Adapter



- **Universeller USB Grafik Adapter mit HDMI Ausgang**
- **Volle 4K Auflösung bei 30Hz**
- **Mit integrierter Audioübertragung für Hörgenuss in Dolby Sourround**
- **Für alle Betriebssysteme; Windows, Mac und Google Chrome**

Technical Features

- USB 3.0 adaptor with Type C port
- Ultra Full HD resolution (3840x2160) at 30 Hz for optimal viewing pleasure
- High-quality aluminium housing

### DIGITUS® USB 3.0 Type C 4K HDMI Graphic Adaptor

- **Universal USB graphic adaptor with HDMI output**
- **Full 4K resolution at 30 Hz**
- **With integrated audio transmission for a superior Dolby Surround experience**
- **For all operating systems: Windows, Mac, and Google Chrome**

- Cable length: 20 cm
- Chipset: VL100 + PS176
- Size: 46 x 37.6 x 13.2 mm
- Weight: 43 g



DA-70836 385950 | USB 3.0 Type C 4K HDMI Graphic Adaptor



### DIGITUS® USB 3.0 auf HDMI/VGA Adapter

- Entspricht den USB 3.0-Spezifikationen
- Full HD Videoauflösung bis zu 1080p
- Unterstützt mehrere Wiedergabemodi: Haupt-/ erweitertes Display, Spiegelung
- Hinzufügen oder Entfernen des Monitors ohne Neustart des Systems

#### Technical Features

- Extends your desktop by either one or two additional displays simultaneously
- Compliant with USB specifications 3.0
- Supports multiple display modes on one PC: primary, extended, mirror
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)

### DIGITUS® USB 3.0 to HDMI/VGA Adapter

- Compliant with USB specifications 3.0
- Full HD resolution up to 1080p
- Supports multiple display modes on one PC: primary, extended, mirror
- Add or remove monitor without system reboot

- Add or remove monitor without system reboot
- Full HD resolution up to 1080p
- USB bus powered
- Supports Windows 10, 8, 7



USB 3.0



HDMI™  
HIGH DEFINITION MULTIMEDIA INTERFACE





### DIGITUS® USB 3.0 zu HDMI Adapter

- Entspricht den USB 3.0-Spezifikationen
- Full HD Videoauflösung bis zu 1080p
- Unterstützt mehrere Wiedergabemodi: Haupt-/erweitertes Display, Spiegelung
- Hinzufügen oder Entfernen des Monitors ohne Neustart des Systems

### DIGITUS® USB 3.0 to HDMI Adapter

- Compliant with USB specifications 3.0
- Full HD resolution up to 1080p
- Supports multiple display modes on one PC: primary, extended, mirror
- Add or remove monitor without system reboot

#### Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)

- Up to 2 graphic adapter simultaneously for PC
- Add or remove monitor without system reboot
- USB bus powered
- Supports Windows 10, 8, 7



DA-70841 390718 | USB 3.0 to HDMI Adapter



### DIGITUS® USB 3.0 zu DVI Adapter

- Entspricht den USB 3.0-Spezifikationen
- Full HD Videoauflösung bis zu 1080p
- Unterstützt mehrere Wiedergabemodi: Haupt-/erweitertes Display, Spiegelung
- Hinzufügen oder Entfernen des Monitors ohne Neustart des Systems

### DIGITUS® USB 3.0 to DVI Adapter

- Compliant with USB specifications 3.0
- Full HD resolution up to 1080p
- Supports multiple display modes on one PC: primary, extended, mirror
- Add or remove monitor without system reboot

#### Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)

- Up to 2 graphic adapter simultaneously for PC
- USB bus powered
- Supports Windows 10, 8, 7



DA-70842 390701 | USB 3.0 to DVI Adapter



### DIGITUS® USB 3.0 zu VGA-Adapter

- Entspricht den USB 3.0-Spezifikationen
- Full HD Videoauflösung bis zu 1080p
- Unterstützt mehrere Wiedergabemodi: Haupt-/erweitertes Display, Spiegelung
- Hinzufügen oder Entfernen des Monitors ohne Neustart des Systems

### DIGITUS® USB 3.0 to VGA adapter

- Compliant with USB specifications 3.0
- Full HD resolution up to 1080p
- Supports multiple display modes on one PC: primary, extended, mirror
- Add or remove monitor without system reboot

#### Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)

- Up to 2 graphic adapter simultaneously for PC
- USB bus powered
- Supports Windows 10, 8, 7



DA-70840 390725 | USB 3.0 to VGA adapter

### DIGITUS® PCIe USB 3.1 Karte Typ C

- USB 3.1 Super Speed bis zu 10 Gbits
- Ergänzt Ihren Computer um 2 USB Typ C Ports
- PCI Express Dual Link Schnittstelle


#### Technical Features

- USB 3.1 SuperSpeed up to 10 Gbps
- Downward compatibility with USB 3.0, 2.0, and 1.1
- Supports data transfer rates of 10 Gbps, 5 Gbps, 480 Mbps, 12 Mbps, and 1.5 Mbps
- 5 V/900 mA at each port
- SATA 15 connector for additional power supply from

### DIGITUS® PCIe USB 3.1 Card Type C

- USB 3.1 SuperSpeed up to 10 Gbps
- Provides your computer with two additional USB Type C ports
- PCI Express Dual Link interface

- the mainboard
- For PCIe interfaces with dual link only
- Overvoltage protection
- Supports Remote Wakeup Function with keyboard or mouse
- Windows Vista/7/8/8.1/10

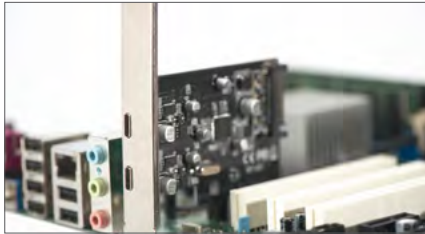

USB 3.1



DS-30223 381211 | PCIe USB 3.1 Card Type C

### DIGITUS® PCI Express Karte, Firewire 1394a (2+1 Port)

- 2x externe und 1x interne IEEE 1394-Ports, 6-pin
- Geeignet für jeden freien PCI Express Steckplatz mit beliebiger Lane Breite
- Datentransferrate 100 / 200 / 400 Mbps


#### Technical Features

- 2x external and 1x internal IEEE 1394 ports, 6-pin
- Chipset: TI XIO2200
- Installs in any available PCI-Express slot with different lane width
- Supports hot-swapping and Plug & play connections

### PCI Express Card, Firewire 1394a (2+1 ports)

- 2x external and 1x internal IEEE 1394 ports, 6-pin
- Installs in any available PCI-Express slot with different lane width
- Data transferrate 100 / 200 / 400 Mbps

- Data transfer rate 100Mbps / 200Mbps / 400Mbps
- Operating temperature: 0 °C ~ 70 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 10, 8, 7, Vista and XP

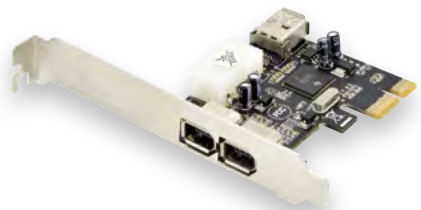

DS-30201-4 390978 | PCI Express Card, Firewire 1394a (2+1 ports)

**DIGITUS® Externes SSD-Gehäuse, mSATA - USB 3.0**



- Unterstützt SATA I-III SSDs/HDDs mit einer Bauhöhe von 9,5 mm oder 7,0 mm
- Unterstützte Kapazität: bis zu 2 TB
- USB 3.1 (Gen 2) - Datenübertragungsrate mit bis zu max. 10 Gbit/s
- Unterstützt Hot-Plugging und ist Plug&Play -fähig

Technical Features

- Suitable for all M50 (50x30x4 mm) mSATA SSDs (SATA II and SATA III)
- SATA - data transfer rate of up to max. 6 Gbit/s
- Chipset: ASM1153E
- USB 3.0 - data transfer rate of up to max. 5 Gbit/s
- Supports UASP (USB Attached SCSI Protocol)
- Power supply via USB 3.0 port, no additional power supply required
- Supports hot-plugging and is plug & play capable

**DIGITUS® External SSD Enclosure, mSATA - USB 3.0**

- Suitable for all M50 (50x30x4 mm) mSATA SSDs (SATA II and SATA III)
- SATA - data transfer rate of up to max. 6 Gbit/s
- Power supply via USB 3.0 port, no additional power supply required
- Supports hot-plugging and is plug & play capable

- LED activity indicator
- Premium and high-quality aluminum housing
- Supports: Win 10 (64 bit), 10, 8.1 (64 bit), 8.1, 8 (64 bit), 8, 7 (64 bit), 7, Vista (64 bit), Vista / Mac OS 10.8 and higher, Linux Kernel 2.6 and higher
- Dimensions: L 6.7 x B 3.9 x H 1.0 cm
- Cable length: 20 cm
- Weight: 30 g
- Color: Black



DA-71112 390534 | External SSD Enclosure, mSATA - USB 3.0

**DIGITUS® Externes SSD-Gehäuse, M2 - USB 3.0**



- SATA - Datenübertragungsrate mit bis zu max. 6 Gbit/s
- Unterstützt M.2-Modul Typ 2280 (80mm), 2260 (60mm), 2242 (42mm) und 2230 (30mm)
- Stromversorgung über USB 3.0 Port
- Unterstützt Hot-Plugging und ist Plug&Play -fähig

Technical Features

- Supports M.2 SATA SSDs
- SATA - data transfer rate of up to max. 6 Gbit/s
- Supports M.2 module type: 2280 (80mm), 2260 (60mm), 2242 (42mm) and 2230 (30mm) with Key B on SATA base
- Chipset: ASM1153E
- USB 3.0 - data transfer rate of up to max. 5 Gbit/s
- Supports UASP (USB Attached SCSI Protocol)
- Power supply via USB 3.0 port, no additional power supply required

**DIGITUS® External SSD Enclosure, M2 - USB 3.0**

- Supports M.2 SATA SSDs
- SATA - data transfer rate of up to max. 6 Gbit/s
- Supports M.2 module type 2280 (80mm), 2260 (60mm), 2242 (42mm) and 2230 (30mm)
- Power supply via USB 3.0 port, no additional power supply required

- Supports hot-plugging and is plug & play capable
- LED activity indicator
- Premium and high-quality aluminum housing
- Supports: Win 10 (64 bit), 10, 8.1 (64 bit), 8.1, 8 (64 bit), 8, 7 (64 bit), 7, Vista (64 bit), Vista / Mac OS 10.8 and higher, Linux Kernel 2.6 and higher
- Dimensions: L 9.7 x B 3.9 x H 1.0 cm
- Cable length: 20 cm
- Weight: 45 g
- Color: Black



DA-71111 390541 | External SSD Enclosure, M2 - USB 3.0

### DIGITUS® 2,5" SSD/HDD-Gehäuse, SATA I-III - USB 3.0

- Unterstützt SATA I-III SSDs/HDDs mit einer Bauhöhe von 9,5 mm oder 7,0 mm
- Unterstützte Kapazität: bis zu 2 TB
- USB 3.0 Datentransferrate bis zu 5Gbps
- Unterstützt Hot-Plugging und ist Plug & Play-fähig
- Edles Aluminiumgehäuse

#### Technical Features

- Supports SATA I-III SSDs/HDDs with a design height of 9.5 mm oder 7.0 mm
- Supported capacity: up to 2 TB
- USB 3.0 data transfer rate up to 5Gbps
- Supports hot-plugging, plug & play capable
- Classy aluminum housing
- Chipset: JMS578
- Compatible with USB 3.0 specification and backward compatible with USB 2.0



### DIGITUS® 2.5" SSD/HDD housing, SATA I-III - USB 3.0

- Supports SATA I-III SSDs/HDDs with a design height of 9.5 mm oder 7.0 mm
- Supported capacity: up to 2 TB
- USB 3.0 data transfer rate up to 5Gbps
- Supports hot-plugging, plug & play capable
- Classy aluminum housing

- LED display for connection, activity and speed
- Power supply via USB port (USB bus-powered)
- Supports: Windows 10, 8.1, 8, 7, Vista, XP/Mac OS 10.6 and higher
- Dimensions: L 12.2 x B 8.0 x H 1.0 cm
- Cable length: 25 cm
- Weight: 180 gColor: black



DA-71105 389934 | Digitus 2.5" SSD/HDD housing, SATA I-III - USB 3.0

### DIGITUS® USB 3.1 Typ-C - SATA 3 Adapterkabel für 2,5" SSDs/HDDs

- Schneller und einfacher Zugriff auf Ihre 2,5" SATA III SSDs/HDDs über den USB 3.1 Typ-C Anschluss Ihres PCs/Notebooks
- Unterstützt 2,5" SATA I-III SSDs/HDDs
- USB 3.1 (Gen 2) - Datenübertragungsrates mit bis zu max. 10 Gbit/s
- Unterstützt UASP (USB Attached SCSI Protocol)
- SATA III - Datenübertragungsrates mit bis zu max. 6 Gbit/s

#### Technical Features

- Faster and easier access to your 2.5" SATA III SSDs/HDDs via the USB 3.1 Type C port on your PCs/notebooks
- Connector 1: USB 3.1 Type C
- Connector 2: SATA (22 pin)
- Supports 2.5" SATA I-III SSDs/HDDs
- USB 3.1 (Gen 2) SuperSpeed- data transfer rate of up to max. 10 Gbit/s
- Supports UASP (USB Attached SCSI Protocol)
- SATA III - data transfer rate of up to max. 6 Gbit/s
- Support capacity: up to 2 TB

### DIGITUS® USB 3.1 Type C - SATA 3 adapter cable for 2.5" SSDs/HDDs

- Faster and easier access to your 2.5" SATA III SSDs/HDDs via the USB 3.1 Type C port on your PCs/notebooks
- Supports 2.5" SATA I-III SSDs/HDDs
- USB 3.1 (Gen 2) - data transfer rate of up to max. 10 Gbit/s
- Supports UASP (USB Attached SCSI Protocol)
- SATA III - data transfer rate of up to max. 6 Gbit/s

- Chipset: ASM1351
- LED activity indicator
- Supports hot-plugging and is plug & play capable
- Power supply via USB port
- Supports: Win 10 (64 bit), 10, 8.1 (64 bit), 8.1, 8 (64 bit), 8, 7 (64 bit), 7, Mac OS 10.11 or higher, Linux Kernel 3.19 or higher, Google Chrome OS
- Cable length: 35 cm
- Weight: 20 g
- Color: Black



DA-70327 390565 | USB 3.1 Type C - SATA 3 adapter cable for 2.5" SSDs/HDDs



### DIGITUS® 2.5 SDD/HDD-Gehäuse, SATA I-II - USB 2.0

- Unterstützt SATA I-II SSDs/HDDs mit einer Bauhöhe von 9,5 mm oder 7,0 mm
- Unterstützte Kapazität: bis zu 2 TB
- USB 2.0 Datentransferrate bis zu 480 Mbps
- Unterstützt Hot-Plugging und ist Plug & Play-fähig
- Edles Aluminium-Gehäuse

#### Technical Features

- Supports SATA I-II SSDs/HDDs with a height of 9.5 mm or 7.0 mm
- Support capacity: up to 2 TB
- USB 2.0 data transfer rate up to 480 Mbps
- Supports hot plugging and is plug & play capable
- Premium aluminum housing
- Chipset: JM20329
- Compatible with USB 2.0 specification

### DIGITUS® 2.5 SSD/HDD Enclosure, SATA I-II - USB 2.0

- Supports SATA I-II SSDs/HDDs with a height of 9.5 mm or 7.0 mm
- Support capacity: up to 2 TB
- USB 2.0 data transfer rate up to 480 Mbps
- Supports hot plugging and is plug & play capable
- Premium aluminum housing

- LED activity indicator
- Power supply via USB (USB bus-powered)
- Supports: Windows 10, 8.1, 8, 7, Vista, XP/Mac OS 10.6 and higher
- Dimensions: L 12.2 x B 8.0 x H 1.0 cm
- Cable length: 25 cm
- Weight: 180 g
- Color: black



DA-71104 391838 | 2.5 SSD/HDD Enclosure, SATA I-II - USB 2.0

### DIGITUS® 2,5" SSD/HDD-Gehäuse, SATA 3 - USB 3.1 Typ-C

- Das externe 2,5" SSD/HDD-Gehäuse, SATA 3 - USB 3.1 Typ-C bietet Datenträgern ein edles Zuhause und liefert dank SuperSpeed extrem schnelle
- Datenübertragungsraten mit bis zu 10 Gbit/s

#### Technical Features

- Supports SATA I-III SSDs/HDDs with a design height of 9.5 mm oder 7.0 mm
- Support capacity: up to 2 TB
- USB 3.1 (Gen 2) SuperSpeed- data transfer rate of up to max. 10 Gbit/s
- SATA III - data transfer rate of up to max. 6 Gbit/s
- Chipset: ASM1351
- LED activity indicator
- Supports hot-plugging and is plug & play capable
- Supports UASP (USB Attached SCSI Protocol)

### DIGITUS® 2.5" SSD/HDD Enclosure, SATA 3 - USB 3.1 Type C

- Supports SATA I-III SSDs/HDDs with a design height of 9.5 mm oder 7.0 mm
- Support capacity: up to 2 TB
- USB 3.1 (Gen 2) - data transfer rate of up to max. 10 Gbit/s

- Premium and high-quality aluminum housing
- Power supply via USB port
- Supports: Win 10 (64 bit), 10, 8.1 (64 bit), 8.1, 8 (64 bit), 8, 7 (64 bit), 7, Mac OS 10.11 or higher, Linux Kernel 3.19 or higher, Google Chrome OS
- Dimensions: L 12.8 x B 8.0 x H 2.0 cm
- Cable length: 30 cm
- Weight: 50 g
- Color: Black



DA-71110 390558 | Digitus 2.5" SSD/HDD Enclosure, SATA 3 - USB 3.1 Type C

### DIGITUS® SSD/HDD Einbaurahmen für den Laufwerksschacht, SATA auf SATA III, 12,7 mm Bauhöhe

- Einbaurahmen für 2,5" SATA Festplatten (HDD) und SSDs
- Geeignet für fast alle SATA-Laufwerksschächte mit einer Bauhöhe von 12,7 mm
- Universell gestaltete Blendenhalterung ermöglicht eine individuelle, optische Anpassung

#### Technical Features

- Mounting frame for 2.5" SATA hard drives (HDD) and SSDs
- Suitable for almost all SATA drive slots with a height of 12.7 mm
- Universally designed visor holder enables individual optical adjustment
- The frame is made of aluminium for an enhanced heat dissipation

### DIGITUS® SSD/HDD Installation Frame, SATA to SATA III, 12.7 mm installation height

- Mounting frame for 2.5" SATA hard drives (HDD) and SSDs
- Suitable for almost all SATA drive slots with a height of 12.7 mm
- Universally designed visor holder enables individual optical adjustment



- Screw driver for easy installation included
- Dimensions: 129 x 128 x 12.7 mm
- Supports Windows 10, 8.1, 8, 7, Vista, XP and Linux
- Compatible to SATA, SATA II and SATA III
- Data transfer speed of up to 6 Gbps
- Compatible to new models of e.g. HP, DELL, ACER, BenQ, Asus, Lenovo, Great Wall



DA-71109 390183 | SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 12.7 mm installation height

### DIGITUS® SSD/HDD Einbaurahmen für den Laufwerksschacht, SATA auf SATA III, 9,5 mm Bauhöhe

- Einbaurahmen für 2,5" SATA Festplatten (HDD) und SSDs
- Geeignet für fast alle SATA-Laufwerksschächte mit einer Bauhöhe von 9,5 mm
- Universell gestaltete Blendenhalterung ermöglicht eine individuelle, optische Anpassung

#### Technical Features

- Mounting frame for 2.5" SATA hard drives (HDD) and SSDs
- Suitable for almost all SATA drive slots with a height of 9.5 mm
- Universally designed visor holder enables individual optical adjustment
- The frame is made of aluminium for an enhanced

### DIGITUS® SSD/HDD Installation Frame, SATA to SATA III, 9.5 mm installation height

- Mounting frame for 2.5" SATA hard drives (HDD) and SSDs
- Suitable for almost all SATA drive slots with a height of 9.5 mm
- Universally designed visor holder enables individual optical adjustment



- heat dissipation
- Screw driver for easy installation included
- Dimensions: 129 x 128 x 9.5 mm
- Supports Windows 10, 8.1, 8, 7, Vista, XP and Linux
- Compatible to SATA, SATA II and SATA III
- Data transfer speed of up to 6 Gbps
- Compatible to e.g. ACER, ASUS, HP, FUJITSU



DA-71108 390176 | SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 9.5 mm installation height



### DIGITUS® Dual Band AC750 WLAN Repeater, Router, Accesspoint

- 802.11ac WLAN Standard mit Übertragungsgeschwindigkeiten bis zu 433Mbps
- Gleichzeitiger Betrieb im 2,4 und 5 GHz Frequenzband
- Fast Ethernet LAN Port zur Einbindung von Geräten ohne eigene WLAN Funktionalität in das Netzwerk
- Fast Ethernet WAN Port zum Aufbau eines Netzwerks im Router Mode
- WPS Button zur einfachen Einbindung in Ihr Bestehendes Netzwerk
- Signalstärke Anzeige über LED's zur optimalen Positionierung

#### Technical Features

- Transmit simultaneously in the 2.4 and 5 GHz bands at speeds of up to 750 Mbps
- Encryption in keeping with 64/128/152-bit WEP, WPA-PSK/WPA2-PSK, and WPA/WPA2 standards

### DIGITUS® Dual Band AC750 WLAN Repeater, access point

- 802.11ac wireless standard with transfer speeds of up to 433 Mbps
- Simultaneous operation on 2.4 and 5 GHz frequency bands
- Fast Ethernet LAN port for connecting devices without their own wireless functionality to the network
- Fast Ethernet WAN port for constructing a network in router mode
- WPS button for simple integration into your existing network
- Signal strength LED display for optimum positioning

- Three external antennae for optimum signal amplification
- WPS button for simple integration into your existing Wi-Fi



DN-70184 385006 | Dual Band AC750 Wireless LAN Repeater with router and access point

### DIGITUS® Tiny USB Wireless 11ac Adapter

- Nano Design – optimal für dauerhaften Einsatz am PC/ Notebook

#### Technical Features

- High speed data transfer rate with up to 867 Mbps
- Complies with 2.4GHz/5GHz 802.11ac and downwards compatible with IEEE 802.11a/b/g/n standards
- Dual band enables selection between 2.4-GHz and 5-GHz wireless networks
- Supports 64/128-bit WEP, WPA / WPA2, and WPA-PSK / WPA2-PSK, 802.1x

### DIGITUS® Tiny USB Wireless 11ac Adapter

- Nano design – optimum for long-term use with a PC/ notebook

- Software WPS
- Supports Windows 10, 8, 7, Vista, Linux and Mac OS 10.x



DN-70566 388494 | Tiny USB Wireless 11ac Adapter

### DIGITUS® 300 Mbps Wireless-N Nano Repeater

- Mehr Reichweite für jedes WLAN Netzwerk
- Super kompaktes Gehäuse für versteckte Positionierung
- Mit der SSID Clone Funktion können Sie ihr WLAN erweitern ohne ein zweites Netzwerk aufbauen zu müssen.
- Dank des niedrigen Energieverbrauchs können Sie den Repeater in jedem beliebigen USB Port mit Strom versorgen.

#### Technical Features

- Wireless LAN 802.11n (Draft 2.0) for wireless high-speed access
- Supports data transfer rates of up to 300 Mbps (11n)
- Downward compatible with 802.11g (54 Mbps) and 802.11b (11 Mbps) standard
- Supports 2.4GHz Wireless LAN networks

### DIGITUS® 300 Mbps Wireless-N Nano Repeater

- More range for every WiFi network
- Ultra compact housing for concealed placement
- With the SSID cloning function you can extend your WiFi network without the need to create a second network.
- Thanks to the low energy consumption, it can be powered over any USB port.

- Maximum wireless LAN encryption with WPA2, WPA, and WEP (128/64)
- Supports WPS (Wireless Protected Setup) - pushbutton to auto-connect to the network via a secure connection
- Cross-platform, supports Windows, Mac OS, Linux, etc.



DN-70185 387350 | 300 Mbps Wireless-N Nano Repeater





**PRESENTATION  
SOLUTIONS**





Video over IP Extender

Video Extender over CAT 5

Video/Audio Converter

Video Signal Repeater

Video Splitter/Switches



**MORE PRESENTATION SOLUTIONS  
IN OUR MAIN CATALOG, PAGES 6 - 41.**

### DIGITUS® 4K Mini DisplayPort auf HDMI Splitter (1x2)

- Geben Sie ein mini DisplayPort-Signal an zwei HDMI Bildschirme gleichzeitig aus
- Ideale Lösung für Video-Wand-Präsentationen oder Grafikanwendungen
- Schnelle und einfache Installation ohne Software und Treiber


Technical Features

- DisplayPort 1.2a compatible
- Resolution: up to 4K Ultra HD, 4096 x 2160p resolution
- Supports Deep Color, 16 bit
- HDMI bandwidth: 3 Gbps per channel
- Supports digital audio transmission
- Supports HDCP 1.3
- Supports 7.1 channel audio

### DIGITUS® 4K Mini DisplayPort to HDMI Splitter (1x2)

- Output one mini DisplayPort signal to two HDMI monitors simultaneously
- Perfect solution for video wall presentations or graphical applications
- Quick, simple installation without software or drivers

- Compact housing – can be discreetly placed anyway
- Low power consumption (standby mode: 25 mW)
- MST (Multi-Stream Transport) support – display different content on each of the two HDMI monitors
- Compatible with all commonly used DisplayPort cables
- Power supply unit input voltage: 5V / 2A

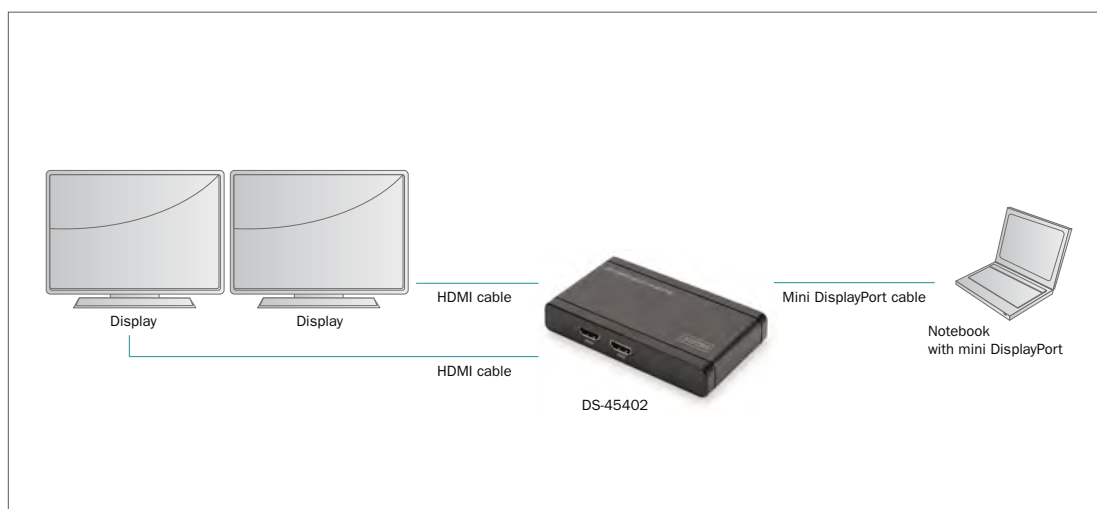

**DIGITUS® UHD HDMI Splitter, 1x4**

- Entdecken Sie das volle Potenzial von UHD - Unterstützt Ultra HD 4K2K (60Hz)
- Verteilen Sie Ihr HDMI-Signal auf bis zu 4 Wiedergabe-Geräte (z.B. Fernseher, Monitor, Beamer)
- Einfacher Anschluss von 4 Wiedergabe-Geräten (Fernseher, Monitor, Beamer) an 1 HDMI-Eingangsquelle
- Unterstützt 4K, Full HD, Full 3D, 4K2K Video
- Unterstützt HDCP 2.2
- Unterstützt komprimierte Audioformate, z.B. DTS Digital, Dolby Digital (inkl. DTS-HD und Dolby True HD)


**DIGITUS® UHD HDMI Splitter, 1x4**

- Discover the full potential of UHD - Supports Ultra HD 4K2K (60Hz)
- Divide your HDMI signal into up to 4 playback devices (e.g. television, monitor, projector)
- Simple connection of 4 playback devices (television, monitor, projector) on 1 HDMI input source
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDCP 2.2
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)

Technical Features

- Discover the full potential of UHD - Supports Ultra HD 4K2K (60Hz)
- HDMI connections: 1x input, 4x outputs
- Divide your HDMI signal into up to 4 playback devices (e.g. television, monitor, projector)
- Simple connection of 4 playback devices (television, monitor, projector) on 1 HDMI input source
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDTV
- Supports HDCP 2.2
- HDMI bandwidth: 600 MHz (max.)

- Supports 600 MHz (max.) bandwidth - 6 Gbit/s (max.) transfer rate per channel
- Supports Deep Color: 12 bits per channel
- Complies with Standard HDMI / High Speed HDMI
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)
- Supports Standard audio, DSD audio, HD (HBR) audio
- Metal housing, black
- Dimensions: L 12.3 x W 5.1 x 2.0 cm
- Weight: 155 g

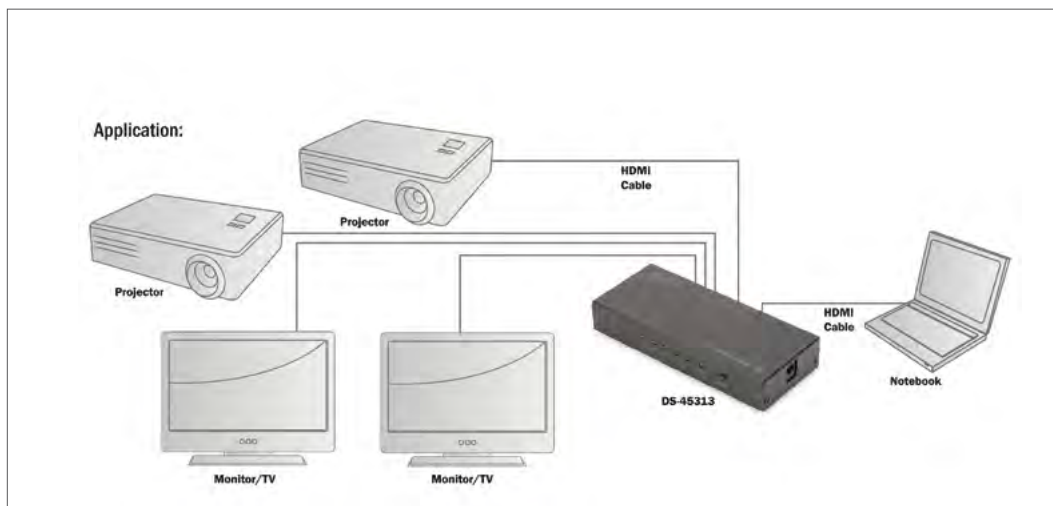

### DIGITUS® 4K HDMI Splitter, 8-Port

- Verteilt ein HDMI-Videosignal auf bis zu 8 Wiedergabegeräte
- Unterstützt Ultra HD (30Hz), 4096 x 2160p Auflösung
- Standard HDMI / High Speed HDMI konform
- HDCP Unterstützung
- Unterstützt komprimierte Audioformate, z.B. DTS Digital, Dolby Digital (inkl. DTS-HD und Dolby True HD)
- Kaskadierbar (1 Stufe) auf bis zu 64 HDMI-Ports


### DIGITUS® 4K HDMI Splitter, 8-Port

- Splitting of HDMI video signals to up to eight playback devices
- Supports Ultra HD (30 Hz), 4096 x 2160 pixel resolution
- Complies with Standard HDMI / High Speed HDMI
- Supports HDCP
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)
- Cascadable (one level) to up to 64 HDMI ports

#### Technical Features

- Splitting of HDMI video signals to up to eight playback devices
- HDMI connections: 4 inputs, 2 outputs
- Supports Ultra HD (30 Hz), 4096 x 2160 pixel resolution
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDTV
- Supports Deep Color (30-bit color depth)
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Status LEDs (connection status)
- Complies with Standard HDMI / High Speed HDMI

- Supports digital audio: Stereo Toslink, Coaxial
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)
- Supports standard audio, for example, DSD audio, HD (HBR) audio
- Complies with HDCP Ver. 1.3
- Supports HDCP repeaters
- Frequency range/data transmission rate: 25 MHz-340 MHz, up to 3.4 Gbps per channel

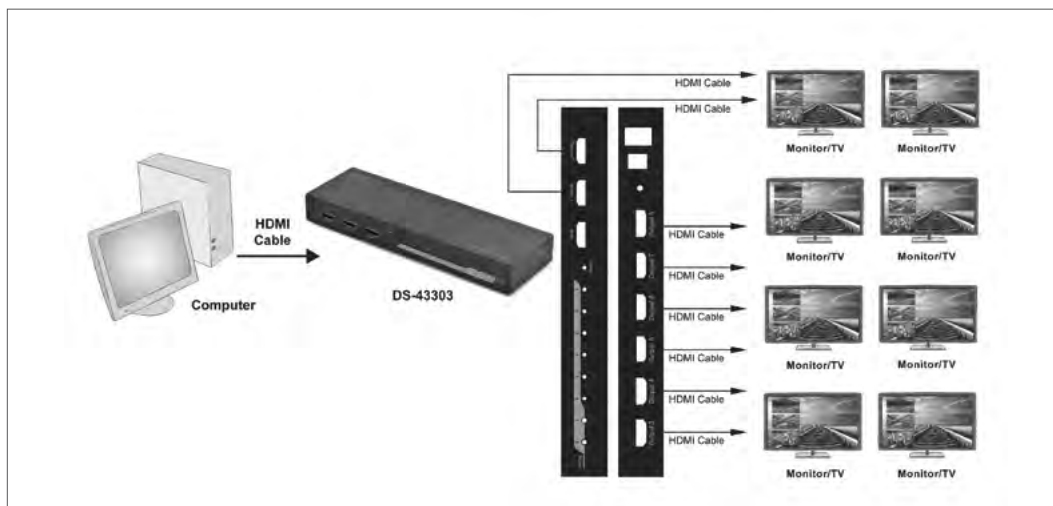

## DIGITUS® HDMI Splitter, 8-Port

- Verteilt ein HDMI-Videosignal auf bis zu 8 Wiedergabegeräte
- Videoauflösung: 1920x1200, 1080p
- Unterstützt Standard HDMI
- HDCP Unterstützung
- Unterstützt komprimierte Audioformate, z.B. DTS Digital, Dolby Digital (inkl. DTS-HD und Dolby True HD)
- Kaskadierbar (1 Stufe) auf bis zu 64 HDMI-Ports


## DIGITUS® HDMI Splitter, 8-port

- Splitting of HDMI video signals to up to eight playback devices
- Video resolution: 1920 x 1200, 1080p
- Supports Standard HDMI
- Supports HDCP
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)
- Cascadable (one level) to up to 64 HDMI ports

### Technical Features

- Splitting of HDMI video signals to up to eight playback devices
- Video resolution: 1920 x 1200, 1080p
- Supports high-speed HDMI
- Supports HDCP (HDCP 1.0/1.1/1.2)
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)
- Cascadable (one level) to up to 64 HDMI ports (playback devices)
- Video resolution: 1920 x 1080. Suitable for 480i, 576i, 1080i, 480p, 576p, 720p, 1080p.

- Supports all 3D formats, including 1080p @ 24 Hz, 720p @ 60 Hz/50 Hz
- Bandwidth of 225 MHz/2.25 Gbps per channel (6.75 Gbps across all channels)
- Supports uncompressed audio formats (LPCM, etc.)
- Supports Deep Color: 12 bits per channel
- Status LEDs (connection status)
- External power supply unit (5V/3A)
- Dimensions: L 11.1 x W 25.8 x D 2.7 cm
- Weight: 730 g

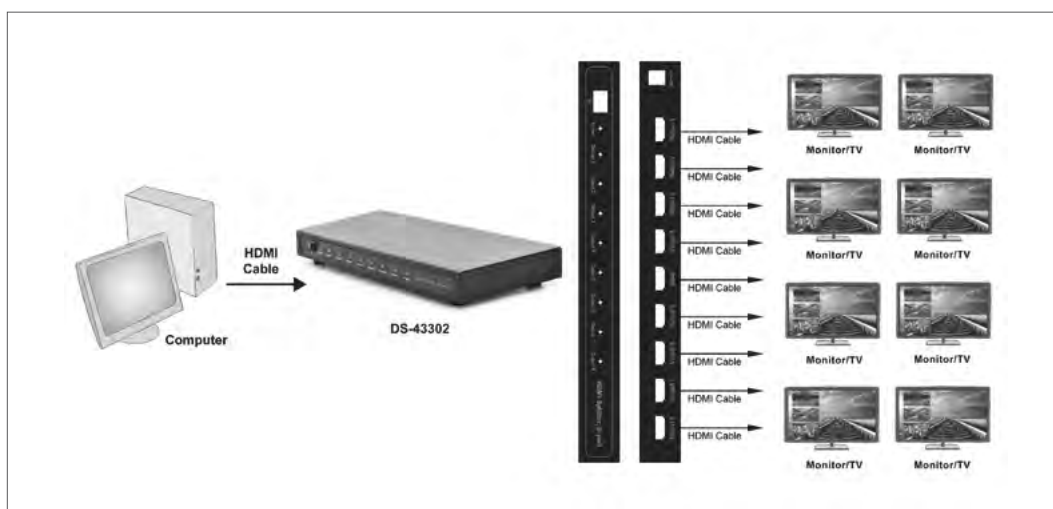

### DIGITUS® 4K HDMI Switch, 3x1

- Bequemes Wechsel zwischen bis zu 3 HDMI-Quellen, ohne lästiges Umstecken
- Unterstützt Ultra HD (30Hz), 4096 x 2160p Auflösung
- Wechseln zwischen den HDMI-Geräten bequem per Fernbedienung, über intelligente automatische Erkennung oder alternativ per Schalter am Switch selbst
- Unterstützt Full HD, Full 3D, 4K2K Video
- Standard HDMI / High Speed HDMI konform


### DIGITUS® 4K HDMI Switch, 3x1

- Discover the full potential of UHD - Supports Ultra HD 4K2K (60Hz)
- Convenient change between up to 5 HDMI sources, without the hassle of inconvenient reconnecting
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDCP 2.2
- Supports 600 MHz (max.) bandwidth - 6 Gbit/s (max.) transfer rate per channel
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)

Technical Features

- HDMI connections: 3 inputs, 1 output
- Supports Ultra HD (30 Hz), 4096 x 2160 pixel resolution
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDTV
- Supports Deep Color: 16 bits per channel, in total 48 bits
- Status LEDs (connection status)
- Complies with Standard HDMI / High Speed HDMI
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)
- Supports Standard audio, DSD audio, HD (HBR) audio

- Data transmission rate: max. 300MHz, up to 3.0 Gbps per channel
- Supports Deep Color: 12 bits per channel, in total 36 bits
- Complies with HDCP Ver. 1.3
- Supports HDCP repeaters
- Includes remote control
- Plastic housing
- Dimensions: L 5,8 x W 8,0 x H 1,8 cm
- Weight: 50 g
- Color: black

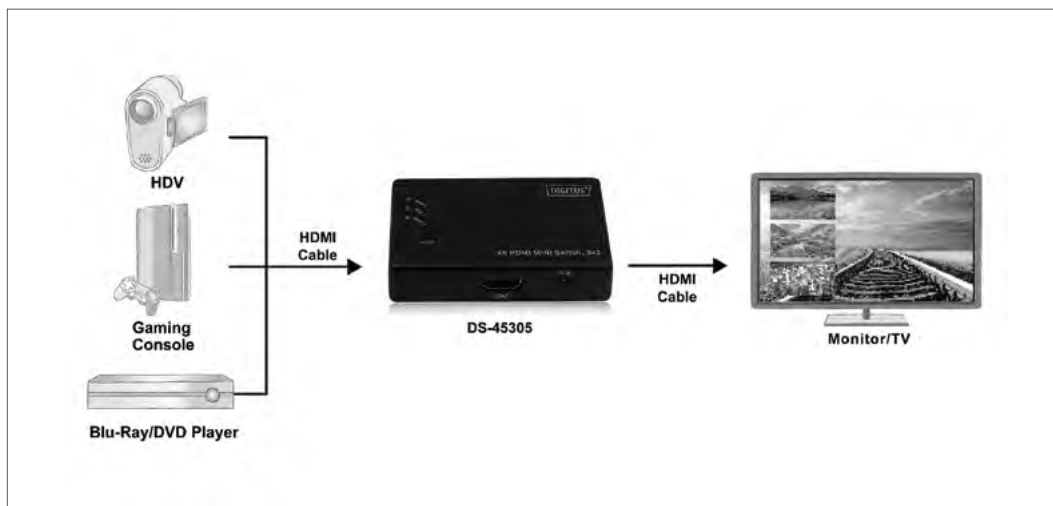



**DIGITUS® 4K HDMI Switch, 4x1**


- **BIB (Bild im Bild) Unterstützung** - Lassen Sie sich eine Miniaturansicht Ihrer angeschlossenen HDMI Signale anzeigen
- **Wechseln zwischen den HDMI-Geräten bequem per Fernbedienung, über intelligente automatische Erkennung oder alternativ per Schalter am Switch selbst**
- **Unterstützt 4K Ultra HD (30Hz), 4K2K Video**
- **Unterstützt Full HD, Full 3D, 4K2K Video**

**DIGITUS® 4K HDMI Switch, 4x1**

- **PIP (Picture-in-Picture) capable** – display content via your HDMI signals in a second, smaller window
- **Comfortably switch between the HDMI devices via remote control, intelligent automatic detection, or by using a button on the switch itself**
- **Supports 4K Ultra HD (30 Hz), 4K2K video**
- **Supports Full HD, Full 3D, 4K2K video**

Technical Features

- HDMI connections: 4 inputs, 1 output
- Supports Ultra HD (30 Hz), 4096 x 2160 pixel resolution
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDTV
- PIP (Picture-in-Picture) capable – display content via your HDMI signals in a second, smaller window
- Supports Deep Color: 16 bits per channel, in total 48 bits
- Status LEDs (connection status)
- Standard/high-speed HDMI compliant
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Supports Standard audio, DSD audio, HD (HBR) audio
- Includes remote control and infrared receiver
- Power supply unit (5 V/1 A)
- Dimensions: L 8.0 x W 5.8 x D 1.8 cm

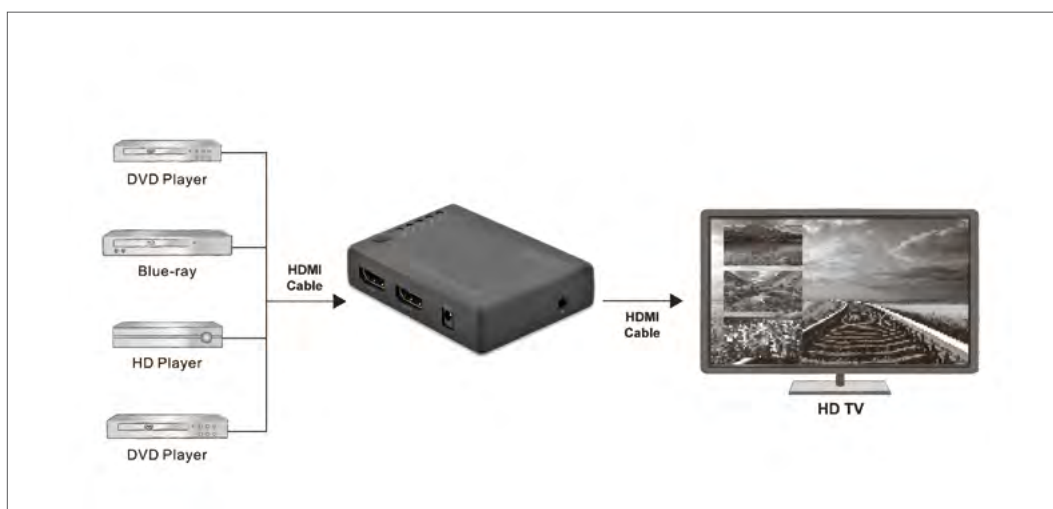

### DIGITUS® UHD HDMI Switch, 3x1

- Entdecken Sie das volle Potenzial von UHD - Unterstützt Ultra HD 4K2K (60Hz)
- Bequemer Wechsel zwischen bis zu 3 HDMI-Quellen, ohne lästiges Umstecken
- Unterstützt 4K, Full HD, Full 3D, 4K2K Video
- Unterstützt HDCP 2.2
- Unterstützt 600 MHz (max.) Bandbreite - 6 GBit/s (max.) Transferrate pro Kanal
- Unterstützt komprimierte Audioformate, z.B. DTS Digital, Dolby Digital (inkl. DTS-HD und Dolby True HD)


### DIGITUS® UHD HDMI Switch, 3x1

- Discover the full potential of UHD - Supports Ultra HD 4K2K (60Hz)
- Convenient change between up to 3 HDMI sources, without the hassle of inconvenient reconnecting
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDCP 2.2
- Supports 600 MHz (max.) bandwidth - 6 Gbit/s (max.) transfer rate per channel
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)

#### Technical Features

- Discover the full potential of UHD - Supports Ultra HD 4K2K (60Hz)
- Convenient change between up to 3 HDMI sources, without the hassle of inconvenient reconnecting
- HDMI connections: 3 inputs, 1 output
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDCP 2.2
- Supports HDTV
- HDMI bandwidth: 600 MHz (max.)
- Supports 600 MHz (max.) bandwidth - 6 Gbit/s (max.) transfer rate per channel
- Supports Deep Color: 12 bits per channel

- Complies with Standard HDMI / High Speed HDMI
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)
- Supports Standard audio, DSD audio, HD (HBR) audio
- Includes remote control
- Metal housing, black
- Dimensions: L 8.0 x W 5.1 x 2.0 cm
- Weight: 110 g

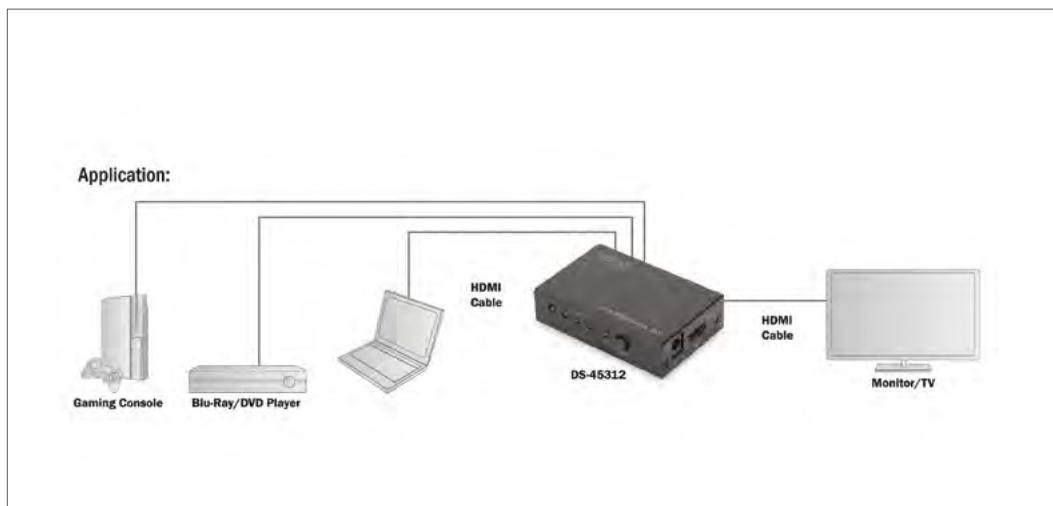

**DIGITUS® UHD HDMI Switch (Pigtail), 3x1**

- Entdecken Sie das volle Potenzial von 4K UHD - Unterstützt Ultra HD 4K2K (60 Hz)
- Bequemes Wechsel zwischen bis zu 3 HDMI-Quellen, ohne lästiges Umstecken
- Unterstützt 4K, Full HD, Full 3D, 4K2K Video
- Unterstützt 600 MHz Bandbreite - 6 GBit/s Transferrate pro Kanal / 18 Gbit/s über alle Kanäle
- Unterstützt HDCP 2.2


**DIGITUS® UHD HDMI Switch (Pigtail), 3x1**

- Discover the full potential of 4K UHD - Supports Ultra HD 4K2K (60 Hz)
- Convenient switching between up to 3 HDMI sources, without the hassle of reconnection
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports 600 MHz bandwidth - 6 Gbit/s transfer rate per channel / 18 Gbit/s over all channels
- Supports HDCP 2.2

Technical Features

- Discover the full potential of 4K UHD - Supports Ultra HD 4K2K (60 Hz)
- HDMI connections: 3 inputs, 1 output
- Convenient switching between up to 3 HDMI sources, without the hassle of reconnection
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDTV
- HDMI bandwidth: 600 MHz (max.)
- HDMI transfer rate: 6.0 Gbit/s per channel - 18.0 Gbit/s over all channels
- Supports Deep Color: 12 bits per channel, in total 36 bits
- Complies with Standard HDMI / High Speed HDMI

- Supports compressed audio formats, e.g., DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Supports Standard audio, DSD audio, HD (HBR) audio
- Supports HDCP 2.2
- Clean black plastic housing
- Dimensions: L 8.0 x W 6.0 x H 2.0 cm
- Weight: 90g

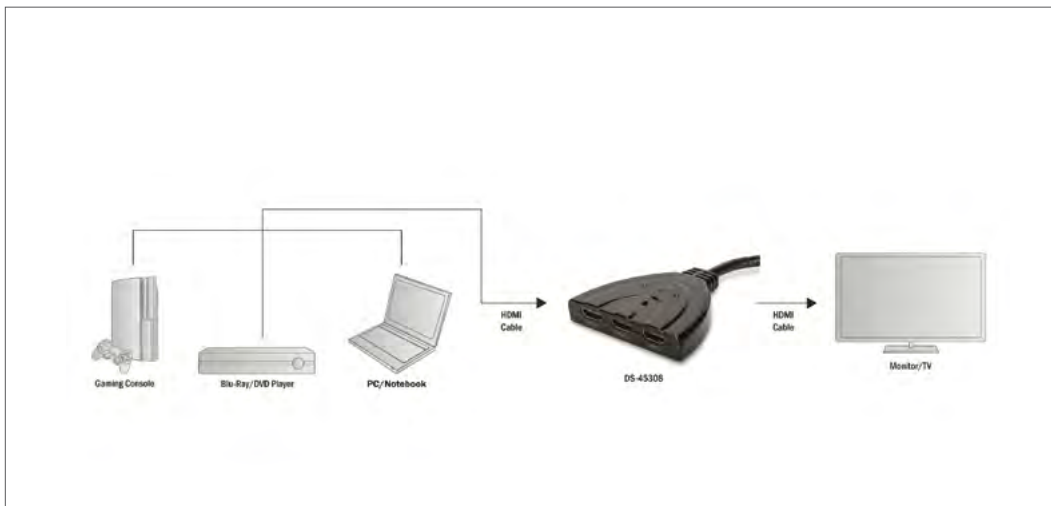

**DIGITUS® UHD HDMI Switch, 5x1**

- Entdecken Sie das volle Potenzial von UHD - Unterstützt Ultra HD 4K2K (60Hz)
- Bequemer Wechsel zwischen bis zu 5 HDMI-Quellen, ohne lästiges Umstecken
- Unterstützt 4K, Full HD, Full 3D, 4K2K Video
- Unterstützt HDCP 2.2
- Unterstützt 600 MHz (max.) Bandbreite - 6 GBit/s (max.) Transferrate pro Kanal
- Unterstützt komprimierte Audioformate, z.B. DTS Digital, Dolby Digital (inkl. DTS-HD und Dolby True HD)


**DIGITUS® UHD HDMI Switch, 5x1**

- Discover the full potential of UHD - Supports Ultra HD 4K2K (60Hz)
- Convenient change between up to 5 HDMI sources, without the hassle of inconvenient reconnecting
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDCP 2.2
- Supports 600 MHz (max.) bandwidth - 6 Gbit/s (max.) transfer rate per channel
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)

Technical Features

- Discover the full potential of UHD - Supports Ultra HD 4K2K (60Hz)
- Convenient change between up to 5 HDMI sources, without the hassle of inconvenient reconnecting
- HDMI connections: 5 inputs, 1 output
- Supports 4K, Full HD, Full 3D, 4K2K video
- Supports HDCP 2.2
- Supports HDTV
- HDMI bandwidth: 600 MHz (max.)
- Supports 600 MHz (max.) bandwidth - 6 Gbit/s (max.) transfer rate per channel

- Supports Deep Color: 12 bits per channel
- Complies with Standard HDMI / High Speed HDMI
- Supports compressed audio formats, for example, DTS Digital, Dolby Digital (including DTS-HD and Dolby TrueHD)
- Includes remote control
- Supports Standard audio, DSD audio, HD (HBR) audio
- Metal housing, black
- Dimensions: L 12.3 x W 5.1 x 2.0 cm
- Weight: 155 g

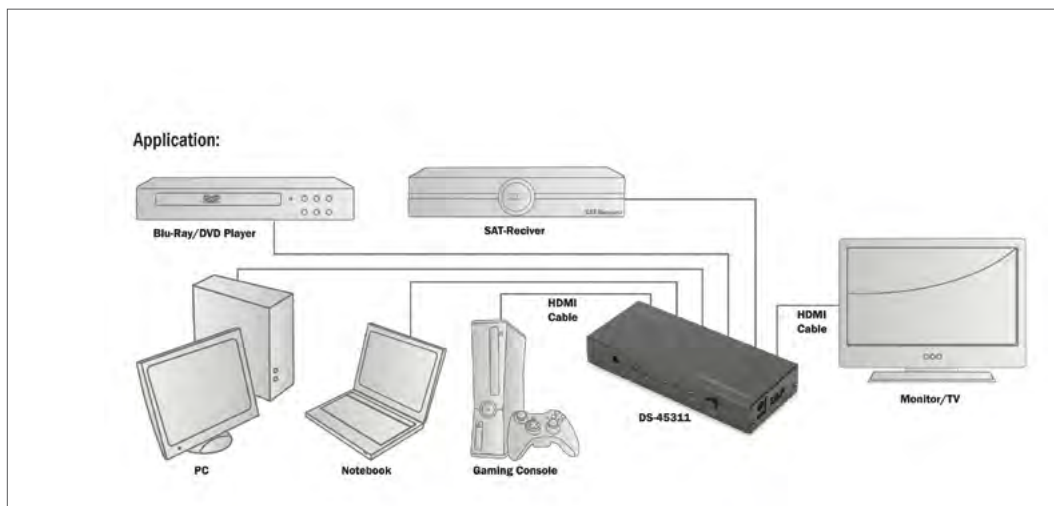



**DIGITUS® 4K HDMI Audio Extraktor**

- Extrahiert das Audio-Signal aus einer HDMI-Quelle
- Ideal geeignet um das HDMI-Audiosignal über Ihre Musikanlage auszugeben
- Kein Qualitätsverlust durch integrierten Verstärker
- Audio Signal über 3,5mm Klinke oder Toslink SPDIF



Technical Features

- Inputs: 1 x HDMI jack, 1 x USB as an optional power source
- Outputs: 1 x 3.5 mm audio jack, 1 x Toslink SPDIF
- Video resolutions of up to 4K at 30hz possible
- Supports CEC and HDCP
- Stereo output (2.1 stereo) via HDMI or 3.5 mm jack
- Audio output (5.1 stereo) via Toslink SPDIF
- Integrated HDMI amplifier ensures signal conditioning/enhancement
- Compatible with all HDMI versions

**DIGITUS® 4K HDMI Audio Extractor**

- Extracts the audio signal from an HDMI source
- Optimally suited for outputting the HDMI signal to your stereo system
- Supports 4K video resolution
- Integrated amplifier ensures no loss of quality

- Maximum HDMI bandwidth: 300 MHz
- HDMI transfer rate: 3.0 Gbps
- Optional power supply via USB if power supplied via HDMI not adequate
- No software or driver installation required
- Supports HDMI audio formats: DTS-HD/Dolby TrueHD
- Lightweight, compact housing
- Color: black
- Weight: 40 g
- Dimensions: 66 x 55 x 20 mm (L x W x H)



**HDMI**  
HIGH DEFINITION MULTIMEDIA INTERFACE

**Ultra HD**  
4K2K / 30 Hz

DS-40132 374084 | 4K HDMI Audio Extractor

**DIGITUS® Digital zu Analog Audio Konverter**

- Konvertiert ein digitales Koaxial oder Toslink Audiosignal in ein analoges Stereosignal um
- Optimale Signalqualität durch integrierten Rauschfilter - verhindert Brummen und Rauschen
- Hervorragende Klangqualität durch bis zu 96 kHz Samplefrequenz



Technical Features

- Convert a digital coaxial or TOSLINK audio signal into an analog stereo signal
- Connect your new devices with your analog stereo system
- Inputs: 1 coaxial / 1 optical TOSLINK
- Output: 1 cinch stereo
- Excellent signal quality due to an integrated noise filter that prevents humming and static

**DIGITUS® Digital-to-analog audio converter**

- Convert a digital coaxial or TOSLINK audio signal into an analog stereo signal
- Excellent signal quality due to an integrated noise filter that prevents humming and static
- Excellent sound quality with sampling rates up to 96 kHz

- Metal housing for perfect shielding
- Low power consumption of 0.5 W
- Sampling rates: 32, 44.1, 48, and 96 kHz
- Power supply via the supplied power supply unit (5 V/1 A)
- Color: Black
- Weight: 78 g
- Dimensions: 5 x 4 x 3 cm



DS-40133 384106 | Digital-to-analog audio converter

**DIGITUS® Toslink Audio Switch 4x1 mit IR-Fernbedienung**

- Verbinden Sie bis zu 4 Abspielgeräte an Ihre Musikanlage
- Verlustfreie Signalübertragung ohne Rauschen und Störungen
- Unterstützt den S/PDIF-Standard für digitale Audio-Übertragung

Technical Features

- Input: 4 x Toslink
- Output: 1x Toslink
- Suitable for all devices with S/PDIF Toslink connector
- Power supply via supplied USB power cable
- Comfortable manual switching between the two channels at the touch of a button using the "Select" button on the switch or using the remote control
- Supported audio formats: LPCM2.0 / DTS / Dolby-

**DIGITUS® Toslink Audio Switch 4x1 with IR Remote Control**

- Connect up to 4 playback devices to your sound system
- Lossless signal transmission without static or distortion
- Supports the S/PDIF standard for digital audio transmission

- AC3 and 5.1 Audio
- Cable range: up to 40 m to output source
- Surge protector
- Plug & Play Installation
- Status LEDs (connection status)
- Weight: 42g
- Dimensions: 60.5 x 20.5 x 54 mm (WxHxD)
- Color: black



DS-40136 388562 | Toslink Audio Switch 4x1 with IR Remote Control

**DIGITUS® Toslink Audio Switch 2x1 mit IR-Fernbedienung**

- Verbinden Sie bis zu 2 Abspielgeräte an Ihre Musikanlage
- Verlustfreie Signalübertragung ohne Rauschen und Störungen
- Unterstützt den S/PDIF-Standard für digitale Audio-Übertragung

Technical Features

- Input: 2x Toslink
- Output: 1x Toslink
- Suitable for all devices with S/PDIF Toslink connector
- Power supply via supplied USB power cable
- Comfortable manual switching between the two channels at the touch of a button using the "Select" button on the switch or using the remote control
- Supported audio formats: LPCM2.0 / DTS / Dolby-

**DIGITUS® Toslink Audio Switch 2x1 with IR Remote Control**

- Connect up to 2 playback devices to your sound system
- Lossless signal transmission without static or distortion
- Supports the S/PDIF standard for digital audio transmission

- AC3 and 5.1 Audio
- Cable range: up to 40 m to output source
- Surge protector
- Plug & Play Installation
- Status LEDs (connection status)
- Weight: 38 g
- Dimensions: 60.5 x 20.5 x 54 mm (WxHxD)
- Color: black



DS-40135 388555 | Toslink Audio Switch 2x1 with IR Remote Control



### DIGITUS® Professional 5-Port Fast Ethernet PoE Desktop Switch + 1x Port Uplink

- Dank der PoE Funktion ist ein zusätzliches Netzteil für die angeschlossenen Geräte nicht erforderlich
- Minimieren Sie Ihren Verkabelungsaufwand für Wireless APs, IP Telefone oder jedes andere PoE-fähige Gerät
- Lüfterloses Design - perfekt für Büroumgebungen oder Meetingräume

#### Technical Features

- 5-Port 10/100 Mbps Fast Ethernet Switch with four PoE ports + 1x Port Uplink
- Ethernet IEEE802.3 / 802.3u / 802.3x / IEEE802.3 af/at
- Ethernet speed: 10/100 Mbps Fast Ethernet
- Power over Ethernet (PoE) – you only need one cable for transferring power and data
- PoE power budget: 62 Watts (one to four ports)

### DIGITUS® Professional 5-Port Fast Ethernet PoE Desktop Switch + 1x Port Uplink

- Thanks to the PoE function, no additional power supply unit is required for the connected devices
- Minimize cabling for wireless APs, IP telephones, and any other PoE capable device
- Fanless design – perfect for office environments and meeting rooms

- Supports PoE: One to four ports (802.af, 15.4 Watts) or for two ports (802.3.at, 30 Watts)
- No configuration required
- Maximum power output: 65 Watts
- Status LEDs on each port
- Dimensions (L x W x H): 130 mm x 86 mm x 29 mm
- Weight: 840g
- Color: Black



DN-95320 380467 | Digitus Professional 5-Port Fast Ethernet PoE Desktop Switch + 1x Port Uplink



### DIGITUS® 6-Port 10/100Mbps Fast Ethernet PoE Switch with 2x Port Uplink

- Dank der PoE Funktion ist ein zusätzliches Netzteil für die angeschlossenen Geräte nicht erforderlich
- Der VLAN Modus sorgt für eine optimale und schnelle Identifikation der angeschlossenen Geräte
- Der Switch kann Betriebssystemunabhängig eingesetzt werden
- Minimieren Sie Ihren Verkabelungsaufwand für Wireless APs, IP Telefone oder jedes andere PoE-fähige Geräte

#### Technical Features

- 6-Port 10/100Mbps Fast Ethernet PoE Switch with four PoE Ports + 2x Port Uplink
- Ethernet IEEE802.3 / 802.3u / 802.3x / 802.1p / 802.1q / IEEE802.3 af/at
- Ethernet Speed: 10/100Mbps Fast Ethernet
- Power over Ethernet (PoE) - You only need one cable for power and data transfer
- Backplane Bandwidth: 1G
- With integrated DIP switch to enable the VLAN Mode
- The VLAN Modus ensures an optimal and fast identification of the connected devices for example IP-Networkcameras thanks to port separation

### DIGITUS® 6-Port 10/100Mbps Fast Ethernet PoE Switch with 2x Port Uplink

- Thanks to the PoE function is an additional power supply for the connected devices not required
- The VLAN mode ensures optimal and quick identification of connected devices
- The switch can be used independent of operating system
- Minimize cabling for wireless APs, IP telephones, and any other PoE capable device

- No configuration necessary
- Maximum power: 60 Watt (with power supply)
- Operating Temperature: 0°C to 55°C
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun
- Dimensions (L x W x H): 135mm x 103mm x 27mm
- Weight: 315 g



DN-95322-1 385936 | 6-Port 10/100Mbps Fast Ethernet PoE Switch with 2x Port Uplink



### DIGITUS® 5-Port 10/100/1000 Mbps PoE Gigabit Desktop Switch + 1x Port Uplink

- Dank der PoE Funktion ist ein zusätzliches Netzteil für die angeschlossenen Geräte nicht erforderlich
- Weniger Verkabelungsaufwand für Wireless APs, IP Telefone oder jedes andere PoE-fähige Gerät
- Lüfterloses Design - perfekt für Büroumgebungen oder Meetingräume

#### Technical Features

- 5-Port 10/100/1000 Mbps PoE Gigabit Desktop Switch with four PoE Ports + 1x Port Uplink
- Ethernet IEEE802.3 / 802.3u / 802.3x / IEEE802.3 af/at
- Power over Ethernet (PoE) - You only need one cable for power and data transfer
- PoE power budget: 62 Watts (one to four ports)
- Supports PoE: One to four ports (802.af, 15.4 Watts) or for two ports (802.3.at, 30 Watts)
- Maximum power output: 65 Watts
- No configuration necessary
- Status LEDs on each port

### DIGITUS® 5-Port 10/100/1000 Mbps PoE Gigabit Desktop Switch + 1x Port Uplink

- Thanks to the PoE function, no additional power supply unit is required for the connected devices
- Minimize cabling for wireless APs, IP telephones, and any other PoE capable device
- Fanless design - perfect for office environments and meeting rooms

- Pin Feet: V+ (RJ45 Pin 1, 2) V- (RJ45 Pin 3, 6)
- Circuit isolation protection
- Backplane: 10Gbps
- MAC address table: 2K
- Dimensions (L x W x H): 140 mm x 95 mm x 39 mm
- Weight: 300g
- Color: Black



DN-95330 390275 | 5-Port 10/100/1000 Mbps PoE Gigabit Desktop Switch + 1x Port Uplink

### DIGITUS® 8-Port 10/100/1000 Mbps PoE Gigabit Desktop Switch

- Dank der PoE Funktion ist ein zusätzliches Netzteil für die angeschlossenen Geräte nicht erforderlich
- Minimieren Sie Ihren Verkabelungsaufwand für Wireless APs, IP Telefone oder jedes andere PoE-fähige Gerät
- Lüfterlos - perfekt für Büroumgebungen

#### Technical Features

- 8-Port 10/100/1000 Mbps PoE Gigabit Desktop Switch
- Ethernet IEEE802.3 / 802.3u / 802.3x / 802.3ab/ IEEE802.3 af/at
- Power over Ethernet (PoE) - You only need one cable for power and data transfer
- PoE power budget: 131 Watts (one to eight ports)
- Supports PoE: Provides 8 PoE Port, each port output 30W maximum power

### DIGITUS® 8-Port 10/100/1000 Mbps PoE Gigabit Desktop Switch

- Thanks to the PoE function, no additional power supply unit is required for the connected devices
- Minimize cabling for wireless APs, IP telephones, and any other PoE capable device
- Fanless design - perfect for office environments and meeting rooms

- No configuration necessary
- Maximum power output: 135 Watts
- Status LEDs on each port
- Pin Feet: V+ (RJ45 Pin 1, 2) V- (RJ45 Pin 3, 6)
- Circuit isolation protection
- Backplane: 16Gbps
- MAC address table: 4K
- Dimensions (L x W x H): 250 mm x 115 mm x 39 mm



DN-95340 390596 | 8-Port 10/100/1000 Mbps PoE Gigabit Desktop Switch

**DIGITUS® 8-Port PoE Gigabit einbaufähiger Switch + 1x SFP Uplink**

- Dank der PoE Funktion ist ein zusätzliches Netzteil für die angeschlossenen Geräte nicht erforderlich
- Weniger Verkabelungsaufwand für Wireless APs, IP Telefone oder jedes andere PoE-fähige Gerät
- Zusätzlicher SFP Uplink Port für Glasfasertechnologie
- Einbaufähig in einem Netzwerkschrank (1 HE)

**DIGITUS® 8-Port PoE Gigabit rack mountable Switch + 1x SFP Uplink**

- Thanks to the PoE function, no additional power supply unit is required for the connected devices
- Minimize cabling for wireless APs, IP telephones, and any other PoE capable device
- Additional SFP-Uplink for Fiber Technology
- Rack mountable in system rack (1U)

Technical Features

- 8-Port 10/100/1000 Mbps PoE Gigabit rack mountable Switch + 1x SFP Uplink
- Ethernet IEEE802.3 / 802.3u / 802.3x/802.3ab/802.3z / IEEE802.3 af/at
- Power over Ethernet (PoE) - You only need one cable for power and data transfer
- PoE power budget: 144 Watts (one to eight ports)
- Supports PoE: Provides 8 PoE Port, each port output 30W maximum power
- No configuration necessary
- Maximum power output: 150 Watts
- Status LEDs on each port

- Pin Feet: V+ (RJ45 Pin 1, 2) V- (RJ45 Pin 3, 6)
- Circuit isolation protection
- Backplane: 18Gbps
- MAC address table: 4K
- Rack mountable in system rack (1U)
- Internal power supply
- Dimensions (L x W x H): 350 mm x 210 mm x 54 mm
- Weight: 1640g
- Color: Black



### DIGITUS® H.264 Video Server

- Analog auf IP (H.264/MJPEG), PoE, ONVIF,
- Integrierter digitaler Eingang/Ausgang (DI/DO) für Alarm und Sensor
- ONVIF-kompatibel

#### Technical Features

- Video Input/Output: 1x BNC In, 1x BNC Out
- 1 x RJ45 10Mbps / 100Mbps network connector
- Two-way audio
- Video compression: H.264 / MJPEG
- Video Resolution: H.264 - D1/ VGA / CIF
- Supported protocols: ARP, IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, QoS, ONVIF
- Security: HTTPS, IP Filter, IEEE 802.1X
- External alarm output and input

### DIGITUS® H.264 Video Server

- Analog to IP (H.264/MJPEG), PoE, ONVIF
- Built-in digital input/output (DI/DO) for alarm and sensor
- ONVIF compliant



- Event Notification: HTTP / FTP / SMTP
- Storage: Supports microSD up to 32GB
- User Accounts: up to 20
- Password Levels: User and Administrator
- Supports RS485 serial interface
- Operating temperature: -10°C ~ 50°C
- Dimension (LxWxH): 137 x 99 x 28 mm
- Weight: 200g
- Power source: PoE / DC 12V - 48V / AC 24V
- Power Consumption: 4.0W



**MONITOR // TV STANDS  
AND WALL MOUNTS**





### **Ergonomie am Arbeitsplatz**

34% aller Deutschen, die einer sitzenden nachgehen, leiden unter Rückenschmerzen.

Bisher sind lediglich 1% aller Arbeitsplätze in Deutschland nach ergonomischen Richtlinien ausgestattet.

Mit Lösungen, die eine flexible, sitzende Tätigkeit genauso wie das Arbeiten am Schreibtisch im Stehen ermöglichen, sowie verschiedenen Monitorhalterungen für eine optimale Betrachtungshöhe und -winkel, bietet DIGITUS® ein Portfolio für diese Anforderungen.

\*Quelle: [www.arbeitssicherheit.de](http://www.arbeitssicherheit.de)

### **Ergonomic workstations**

34% of all Germans working in a office suffer from back pain due to unergonomic office equipment.

Currently only 1% of all workstations in Germany are equipped according to ergonomic guidelines.

With flexible solutions from DIGITUS® that offer the opportunity to work sitting as well as standing

DIGITUS® is offering you a portfolio of different monitor mounts for optimal height and angle adjustment as well as flexible solutions for a sitting or standing work routine.



**MORE MOUNTING PRODUCTS IN OUR  
MAIN CATALOG, PAGES 142 - 149.**

### DIGITUS® Universal Glas Monitorerhöhung

- Strukturieren Sie Ihren Arbeitsplatz, unter ergonomischen Gesichtspunkten neu
- Eleganter Glas Ständer
- Gehärtetes Sicherheitsglas
- Rutschhemmende Silikon Füße
- Für die meisten Monitore von 33 (13") bis 81cm (32")

### DIGITUS® Universal glass monitor riser

- Create a ergonomic and clutter free desktop
- Elegant glass stand
- Tempered safety glass
- Anti-slip silicone pads for a safe stand
- Fits most 13" (33cm) -32" (81cm) screens

Technical Features

- Footprint of 56x21cm
- Material: Tempered glass, aluminium and plastic
- Height: 8cm

- Max load: 20kg
- Weight: 1,51kg
- Dimensions: 56x21x8cm



### DIGITUS® Ergonomischer Schreibtischaufsatz

- Richten Sie sich Ihren persönlichen Ergonomischen Arbeitsplatz ein
- Sie können Ihren Arbeitsplatz zwischen 13 bis 50cm Höhe einstellen
- Untere Ebene für Maus und Tastatur
- Einstellbare Feder zur Anpassung an das Gewicht Ihres Monitors
- Fertig zusammengebaut für sofortigen Einsatz


#### Technical Features

- Desktop area: 90x64cm
- Lower deck for mouse and keyboard
- Desktop thickness: 15mm
- Height adjustable between 13 to 50cm

### DIGITUS® Ergonomic Workspace Riser

- Create your personal ergonomic workspace at low cost
- You are able to raise your workspace between 13 to 50cm
- Lower deck for mouse and keyboard
- Adjustable spring to match the weight of your devices
- Comes fully assembled


- Max load: 15kg
- Weight: 22,55kg
- Dimensions: 90x64x13cm



Watch Product Video



### DIGITUS® Universal Notebook Halter für Monitorhalterungen

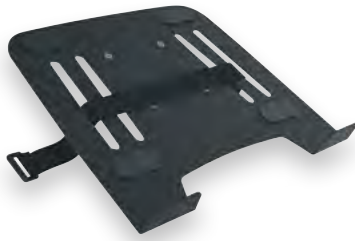

- Zur parallelen Ausrichtung Ihres Notebookmonitors mit Ihrem Zweitdisplay
- Universell passend zu allen Monitorhalterungen mit Gasdruckfeder und VESA 75 x 75 Aufnahme
- Kompatibel mit DA-90351 / DA-90353

#### Technical Features

- VESA mounting pattern: 75 x 75
- Weight: 1 kg
- Dimensions: 300 x 265 x 20 mm
- For notebooks up to 15"

### DIGITUS® Universal notebook base for monitor mounts

- Set up your notebook monitor to output in parallel on a second display
- Universally suitable for all monitor mounts with gas springs and a 75 x 75 VESA mounting pattern
- Compatible with DA 90351 / DA 90353

- Suitable for gas spring mounts
- Compatible with DA 90351 / DA 90353
- Max load: 4kg



DA-90355 382713 | Universal notebook base for monitor mounts

### DIGITUS® VESA Adapter Kit für iMac und Apple Displays



- Verwenden Sie Ihren iMac oder Apple Display an einer VESA-kompatiblen Befestigungslösung für Wand oder Schreibtisch
- Einfache und unkomplizierte Installation

#### Technical Features

- Suitable for the 75 x 75 VESA mounting pattern
- Weight: 0.28 kg
- Dimensions: 96 x 75 x 60 mm

### DIGITUS® VESA Adapter Kit for iMac and Apple displays

- Use your iMac or Apple display with a wall or desk mounting solution that is compatible with the VESA standard
- Simple and easy installation

- Suitable for 24" and 27" iMacs, 24" and 27" LED Cinema Displays, and 27" Thunderbolt Displays



DA-90356 382270 | VESA Adapter Kit for iMac and Apple displays




### DIGITUS® Universal LED/LCD Monitor Wandhalterung

- Universell geeignet für alle LED, LCD und Plasma TVs mit Befestigungsmöglichkeit nach VESA-Norm
- Zur Wandbefestigung für Geräte mit Bilddiagonale von 82cm (32") bis 140cm (55")
- Frei einstellbarer vertikaler Neigungswinkel bis 10°
- Mitgelieferte Wasserwaage zur Montage
- Federsicherung zur Arretierung des TV Gerätes in der Halterung

#### Technical Features

- Suitable for VESA mounting patterns of 200 x 200, 300 x 300, 400 x 200, and 400 x 400 mm
- Maximum load bearing capacity: up to 35 kg
- Weight: 1.2 kg
- Dimensions: 498 x 425 x 34 mm
- Universally suitable for all LED, LCD, and plasma TVs with a mounting option in accordance with the VESA

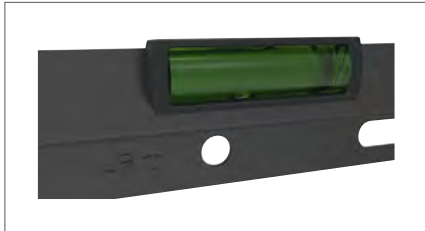

### DIGITUS® Universal LED/LCD Monitor Wall Mount

- Universally suitable for all LED, LCD, and plasma TVs with a mounting option in accordance with the VESA standard
- For wall-mounting devices with a screen diagonal of 82 cm (32") to 140 cm (55")
- Freely adjustable vertical tilt angle up to 10 °
- Spirit level included for installation
- Spring protection to lock the TV in the mount

- standard
- For wall-mounting devices with a screen diagonal of 82 cm (32") to 140 cm (55")
- Freely adjustable vertical tilt angle up to 10 degrees
- Spirit level included for installation
- Spring protection to lock the TV in the mount



DA-90334 379980 | Universal LED/LCD Monitor Wall Mount 55" tilting

### DIGITUS® Universal LED/LCD Monitor Wandhalterung

- Universell geeignet für alle LED, LCD und Plasma TVs mit Befestigungsmöglichkeit nach VESA-Norm
- Zur Wandbefestigung für Geräte mit Bilddiagonale von 119cm (47") bis 178cm (70")
- Frei einstellbarer vertikaler Neigungswinkel bis -12 Grad
- Mitgelieferte Wasserwaage zur Montage
- Federsicherung zur Arretierung des TV Gerätes in der Halterung


#### Technical Features

- Suitable for standard VESA mounting patterns of 200 x 200, 300 x 300, 400 x 200, 400 x 400, and 600 x 400 mm
- For mounting devices with a screen diagonal of 119 cm (47") to 178 cm (70") to the wall
- Freely adjustable vertical tilt angle up to -12°
- Spirit level included for installation

### DIGITUS® Universal LED/LCD Monitor Wall Mount

- Universally suitable for all LED, LCD, and plasma TVs with a mounting option in accordance with the VESA standard
- For mounting devices with a screen diagonal of 119 cm (47") to 178 cm (70") to the wall
- Freely adjustable vertical tilt angle up to -12°
- Spirit level included for installation
- Spring protection to lock the TV in the mount

- Spring protection to lock the TV in the mount
- Max. load bearing capacity: 40 kg
- Weight: 2.1 kg
- Dimensions: 712 x 435 x 35 mm

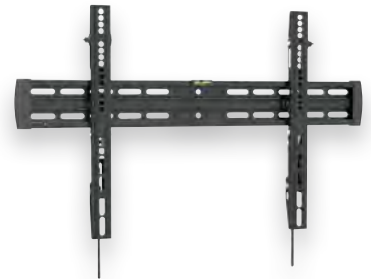

DA-90352 382690 | Universal LED/LCD Monitor Wall Mount

**DIGITUS® VESA Adapter für Monitore ohne VESA Aufnahme**

- Geeignet für alle Monitorhalterungen mit VESA 75x75 und 100x100 Standard
- Geeignet für die meisten Monitore von 43 (17“) bis 76cm (30“)
- Für Monitore mit einer Rahmentiefe von 2-7cm
- Maximale Tragfähigkeit 8 kg

**DIGITUS® Adapter for mounting monitors without VESA holes**

- For all monitor mounts according to VESA 75x75 and 100x100 standard
- Suitable for most monitors between 17“ to 30“
- For monitors with a depth of 2 - 7cm
- Max load 8kg

Technical Features

- For all monitor mounts according to VESA 75x75 and 100x100 standard
- Suitable for most monitors between 17“ to 30“
- For monitors with a depth of 2 - 7cm
- Max load 8kg



### DIGITUS® Universal Single Monitor Ständer

- Universell geeignet für alle LED und LCD Monitore mit Befestigungsmöglichkeit nach VESA-Norm
- Ständer zur flexiblen Monitorarretierung auf Ihrem Arbeitsplatz

#### Technical Features

- Suitable for standard VESA mounting patterns of 75 x 75 and 100 x 100 mm
- Max. load bearing capacity: 10 kg
- For monitors up to 69 cm (27") and with a maximum weight of 10 kg

### DIGITUS® Universal Single Monitor Stand

- Universally suitable for all LED and LCD monitors with a mounting option in accordance with the VESA standard
- Stand for flexible arrangement of your monitor on your desktop

- Freely adjustable vertical tilt angle of up to 45°
- Freely swivels up to 45°
- Can be rotated 360°
- Weight: 2.9 kg
- Dimensions: 466 x 316 x 434 mm



DA-90346 382638 | Universal Single Monitor Stand

### DIGITUS® Universal Dual Monitor Ständer mit Klemmbefestigung

- Universell geeignet für alle LED und LCD Monitore mit Befestigungsmöglichkeit nach VESA-Norm
- Ständer zur flexiblen Monitorarretierung auf Ihrem Arbeitsplatz

#### Technical Features

- Suitable for standard VESA mounting patterns of 75 x 75 and 100 x 100 mm
- For desktops up to 7.5 cm thick
- For monitors up to 69 cm (27") and with a maximum weight of 16 kg

### DIGITUS® Universal Dual Monitor Stand with clamping assembly

- Universally suitable for all LED and LCD monitors with a mounting option in accordance with the VESA standard
- Stand for flexible arrangement of your monitors on your desktop

- Freely adjustable vertical tilt angle of up to 45°
- Can be rotated 360°
- Weight: 4.1 kg
- Dimensions: 726 x 450 x 35 mm



DA-90349 382676 | Universal Dual Monitor Stand with clamping assembly

### DIGITUS® U DIGITUS® Universal Dual Monitor Ständer

- Universell geeignet für alle LED und LCD Monitore mit Befestigungsmöglichkeit nach VESA-Norm
- Ständer zur flexiblen Monitorarretierung auf Ihrem Arbeitsplatz

#### Technical Features

- Suitable for standard VESA mounting patterns of 75 x 75 and 100 x 100 mm
- For monitors up to 69 cm (27") and with a maximum weight of 16 kg
- Freely adjustable vertical tilt angle of up to 45°

### DIGITUS® Universal Dual Monitor Stand

- Universally suitable for all LED and LCD monitors with a mounting option in accordance with the VESA standard
- Stand for flexible arrangement of your monitors on your desktop

- Freely swivels up to 90°
- Can be rotated 360°
- Weight: 4.8 kg
- Dimensions: 726 x 466 x 316 mm



DA-90348 382669 | Universal Dual Monitor Stand

### DIGITUS® Universal Wandhalterung mit Schwenkfunktion



- Universell geeignet für alle LED und LCD Monitore mit Befestigungsmöglichkeit nach VESA-Norm
- Für Monitore bis 69cm (27") und 15kg Maximalgewicht
- Frei Schwenkbar um +/-15 Grad
- Drehbar um 360 Grad
- Mitgelieferte Wasserwaage zur Montage

### DIGITUS® Universal Wall Mount with swivel function

- Universally suitable for all LED and LCD monitors with a mounting option in accordance with the VESA standard
- For monitors up to 69 cm (27") and with a maximum weight of 15 kg
- Freely swivels +/-15°
- Can be rotated 360°
- Spirit level included for installation

#### Technical Features

- Suitable for standard VESA mounting patterns of 75 x 75 and 100 x 100 mm
- Max. load bearing capacity: 15 kg
- Weight: 0.8 kg
- Dimensions: 140 x 80 x 64 mm



DA-90350 382683 | Universal Wall Mount with swivel function

### DIGITUS® Universal LED/LCD Monitor Wandhalterung



- Universell geeignet für alle LED und LCD Monitore mit Befestigungsmöglichkeit nach VESA-Norm
- Zur Wandbefestigung für Geräte mit Bild diagonale von 48cm (19") bis 107cm (42")
- Frei schwenkbar um 90 Grad
- Frei einstellbarer vertikaler Neigungswinkel bis 15 Grad
- Flexibler Wandabstand von 6,3 bis 41cm
- Integrierte Kabelführung

### DIGITUS® Universal LED/LCD Monitor Wall Mount

- Universally suitable for all LED and LCD monitors with a mounting option in accordance with the VESA standard
- For mounting devices with a screen diagonal of 48 cm (19") to 107 cm (42") to the wall
- Freely swivels up to 90°
- Freely adjustable vertical tilt angle up to 15°
- Flexible mounting profile from wall (6.3 to 41 cm)
- Integrated cable organizer

#### Technical Features

- Suitable for standard VESA mounting patterns of 75 x 75, 100 x 100, 200 x 100, and 200 x 200 mm.
- For mounting devices with a screen diagonal of 48 cm (19") to 107 cm (42") to the wall

- Max. load bearing capacity: 30 kg
- Weight: 1.7 kg



DA-90357 382706 | Universal LED/LCD Monitor Wall Mount

**DIGITUS® Universal Wandhalterung  
für Monitore bis 69cm (27")**

- Nur 18mm Wandabstand
- Integrierte Wasserwaage zur einfachen Montage


Technical Features

- Suitable for standard VESA mounting patterns of 75 x 75 and 100 x 100 mm
- For monitors up to 69 cm (27") and with a maximum weight of 18 kg
- Minimal mounting profile from wall (18 mm)

**DIGITUS® Universal Wall Mount for  
monitors up to 69 cm (27")**

- Minimal mounting profile from wall (18 mm)
- Integrated spirit level for easy mounting

- Integrated spirit level for easy mounting
- Weight: 0.3 kg
- Dimensions: 120 x 120 x 18 mm

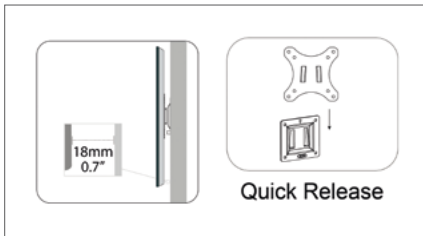

DA-90303-1 383123 | Universal Wall Mount for monitors up to 69 cm (27")

**DIGITUS® Universal Wandhalterung  
für Monitore bis 94cm (37")**

- Nur 18mm Wandabstand
- Integrierte Wasserwaage zur einfachen Montage


Technical Features

- Suitable for standard VESA mounting patterns of 75 x 75, 100 x 100, 200 x 100, and 200 x 200 mm.
- For monitors up to 94 cm (37") and with a maximum weight of 37 kg
- Minimal mounting profile from wall (18 mm)

**DIGITUS® Universal Wall Mount for  
monitors up to 94 cm (37")**

- Minimal mounting profile from wall (18 mm)
- Integrated spirit level for easy mounting

- Integrated spirit level for easy mounting
- Weight: 0.7 kg
- Dimensions: 220 x 220 x 18 mm

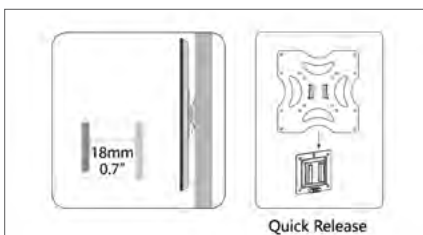

DA-90310-1 385363 | Universal Wall Mount for monitors up to 94 cm (37")

### DIGITUS® Flexibler Arbeitsplatz zur Wandmontage

- Universell geeignet für alle LED und LCD Monitore mit Befestigungsmöglichkeit nach VESA-Norm
- Zur Wandmontage für Geräte mit einer Bilddiagonale von 43cm (17") bis 69cm (27")
- Flexibel schwenkbar bis zu 180°
- Frei einstellbarer vertikaler Neigungswinkel bis 90 Grad
- Flexibel in der Höhe einstellbar
- Monitor um 180° drehbar

### DIGITUS® Flexible wall mount for workspaces

- Universally suitable for all LED and LCD monitors with a mounting option in accordance with the VESA standard
- For mounting devices with a screen diagonal of 43 cm (17") to 69 cm (27") to the wall
- Freely swivels up to 180°
- Freely adjustable vertical tilt angle of up to 90°
- Freely adjustable height
- Rotate monitor up to 180°

Technical Features

- Integrated cable routing
- Suitable for standard VESA mounting patterns of 75 x 75 and 100 x 100 mm

- Max. load bearing capacity: 8 kg
- Weight: 4.2 kg
- Dimensions: 700 x 700 x 520 mm



### DIGITUS® Universal LED/LCD Tischhalterung mit Gasdruckfeder

- Universell geeignet für alle LED und LCD Monitore mit Befestigungsmöglichkeit nach VESA-Norm
- Zur Tischmontage für Geräte mit einer Bilddiagonale von 43cm (17") bis 69cm (27")
- Flexibel schwenkbar bis zu 180°
- Frei einstellbarer vertikaler Neigungswinkel bis 90 Grad
- Flexibel in der Höhe einstellbar
- Monitor um 180° drehbar

#### Technical Features

- Integrated cable organizer
- Suitable for standard VESA mounting patterns of 75 x 75 and 100 x 100 mm
- Mount devices with a screen diagonal of 43 cm (17") to 69 cm (27") on a table

### DIGITUS® Universal LED/LCD table mount with gas spring

- Universally suitable for all LED and LCD monitors with a mounting option in accordance with the VESA standard
- Mount devices with a screen diagonal of 43 cm (17") to 69 cm (27") on a table
- Freely swivels up to 180°
- Freely adjustable vertical tilt angle up to 90°
- Freely adjustable height
- Rotate monitor up to 180°

- Max. load bearing capacity: 8 kg
- Weight: 2.5 kg
- Dimensions: 150 x 390 x 320 mm



DA-90351 383147 | Universal LED/LCD table mount with gas spring

### DIGITUS® Universal Dual LED/LCD Tischhalterung mit Gasdruckfeder

- Universell geeignet für alle LED und LCD Monitore mit Befestigungsmöglichkeit nach VESA-Norm
- Zur Tischmontage für Geräte mit einer Bilddiagonale von 43cm (17") bis 69cm (27")
- Flexibel schwenkbar bis zu 180°
- Frei einstellbarer vertikaler Neigungswinkel bis 90 Grad
- Flexibel in der Höhe einstellbar
- Monitor um 180° drehbar


#### Technical Features

- Integrated cable organizer
- Suitable for standard VESA mounting patterns of 75 x 75 and 100 x 100 mm

### DIGITUS® Universal dual LED/LCD table mount with gas spring

- Universally suitable for all LED and LCD monitors with a mounting option in accordance with the VESA standard
- Mount devices with a screen diagonal of 43 cm (17") to 69 cm (27") on a table
- Freely swivels up to 180°
- Freely adjustable vertical tilt angle up to 90°
- Freely adjustable height
- Rotate monitor up to 180°

- Max. load bearing capacity: 8 kg per arm
- Weight: 4.7 kg
- Dimensions: 150 x 890 x 320 mm

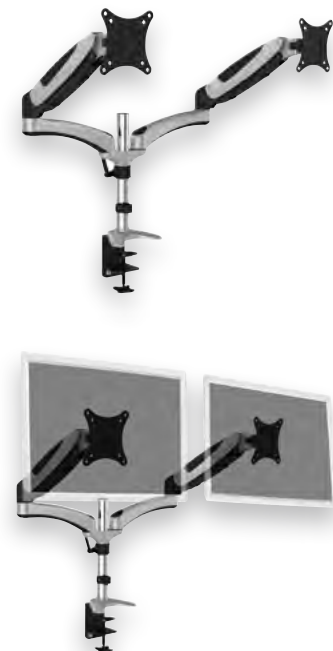

DA-90353 385370 | Universal dual LED/LCD table mount with gas spring

### DIGITUS® Fixe Video Wall Mount Halterung

- Einfache Ausrichtung der Panels dank Mikrojustierung
- Seitlich verschiebbare Halterungen zur einfachen Ausrichtung
- Für die meisten Monitore zwischen 114 bis 178cm Diagonale geeignet
- Bis zu VESA 600x400 Lochabstand geeignet
- Neigungsständer zur einfachen Kabelinstallation und Wartung
- Diebstahlschutz Möglichkeit (Vorhängeschloss benötigt)

### DIGITUS® Fixed Video Wall Mount

- Easy alignment with micro adjustments
- Lateral shift brackets enable fast alignment
- For most screens between 45 to 70"
- Max VESA 600x400
- Kickstand provides 12° of tilt for easy cable management and maintenance
- Anti-theft design for additional security (padlock required)

Technical Features

- VESA 200x200, 400x200, 300x300, 400x400, 600x400
- Max load: 70kg
- Tilt -5° - +3°

- Distance to wall 76mm
- Weight: 5,48kg
- Dimensions: 934x483x76mm







CABLES





**MORE CABLE PRODUCTS IN OUR  
MAIN CATALOG, PAGES 160 - 167.**

## HDMI



Type A, M/M



Type D - A, M/M



Type A - DVI (18+1), M/M



Type C - type A, M/M

Type	Art. No.	EAN	Name	Length
HDMI	DB-330107-100-S	4016032383352	HDMI High Speed connection cable, type A, M/M, w/Ethernet, 4K Ultra HD, UL, bl, gold	10,0 m
	DB-330114-010-S	4016032383307	HDMI High Speed connection cable, type A, M/M, w/Ethernet, Full HD, UL, bl, gold	1,0 m
	DB-330114-020-S	4016032383314	HDMI Standard connection cable, type A, M/M, w/Ethernet, Full HD, UL, bl, gold	2,0 m
	DB-330114-030-S	4016032383338	HDMI Standard connection cable, type A, M/M, w/Ethernet, Full HD, UL, bl, gold	3,0 m
	DB-330114-050-S	4016032383345	HDMI Standard connection cable, type A, M/M, w/Ethernet, Full HD, UL, bl, gold	5,0 m
	DB-330300-020-S	4016032383383	HDMI adapter cable, type A-DVI (18+1), M/M, Full HD, UL, bl	2,0 m

## DISPLAYPORT



DP, M/M



DP - DVI (24+1), M/M



DP - HDMI type A, M/F



Mini DP - DP, M/M

Type	Art. No.	EAN	Name	Length
DISPLAY PORT	DB-340100-020-S	4016032292142	DisplayPort connection cable, DP, M/M, w/interlock, DP 1.2, Ultra HD 4K, UL, bl	2,0 m
	DB-340301-020-S	4016032292234	DisplayPort adapter cable, DP - DVI (24+1), M/M, w/interlock, DP 1.1a compatible, UL, CE, bl	2,0 m
	DB-340400-001-S	4016032292296	DisplayPort adapter cable, DP - HDMI type A, M/F, w/interlock, DP 1.1a compatible, UL, CE, bl	0,15 m
	DB-340403-001-S	4016032292326	DisplayPort adapter cable, DP - HD15, M/F, w/interlock, DP 1.1a compatible, UL, CE, bl	0,15 m
	DB-340404-001-W	4016032292425	DisplayPort adapter cable, mini DP - HDMI type A, M/F, DP 1.1a, UL, CE, wh	0,15 m
	DB-340407-001-W	4016032292456	DisplayPort adapter cable, mini DP - HD15, M/F, DP 1.1a, UL, CE, wh	0,15 m
	DB-340409-001-S	4016032383222	DisplayPort adapter cable, DP - DVI (24+5), M/F, w/interlock, DP 1.1a compatible, UL, bl	0,15 m
	DB-340602-000-S	4016032292470	DisplayPort adapter, DP - HDMI type A, M/F, w/interlock, DP 1.1a, Full HD, UL, CE, bl	-



## VGA




HD15 M/M, 3Coax



HD15 - 2xHD15, M/F

Type	Art. No.	EAN	Name	Length
VGA	DB-310100-018-S	4016032383482	VGA Monitor connection cable, HD15, M/M, 3Coax/4C, bl	1,8 m
	DB-310103-100-S	4016032383529	VGA Monitor connection cable, HD15, M/M, 3Coax/7C, 2xferritem, UL, bl	10,0 m
	DB-310103-150-S	4016032383550	VGA Monitor connection cable, HD15, M/M, 3Coax/7C, 2xferrite, UL, bl	15,0 m
	DB-310400-002-S	4016032383567	VGA Monitor Y-splitter cable, HD15 - 2xHD15, M/F, passiv, UL, bl, gold	0,2 m

## DVI

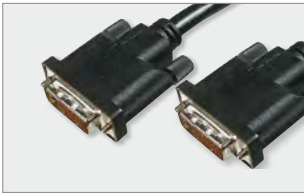

DVI (24+1), 2x ferrit, M/M



DVI (18+1), HDMI Type A, M/F



DVI (24+1), VGA, M/F

Type	Art. No.	EAN	Name	Length
DVI	DB-320107-020-S	4016032383413	DVI connection cable, DVI(18+1), DVI-D single link, UL, bl	2,0 m
	DB-320107-020-S	4016032383413	DVI connection cable, DVI(18+1), M/M, DVI-D single link, UL, bl	2,0 m
	DB-320108-020-S	4016032307372	DVI connection cable, DVI(24+1), M/M, DVI-D dual link, UL, bl	2,0 m
	DB-320108-020-S	4016032307372	DVI connection cable, DVI(24+1), M/M, DVI-D dual link, UL, bl	2,0 m
	DB-320500-000-S	4016032298762	DVI Adapter, DVI(18+1) - HDMI type A, M/F, DVI-D single link, Full HD, bl	-
	DB-320504-000-S	4016032301295	DVI adapter, DVI(24+5) - HD15, M/F, DVI-I dual link, bl	-



## USB 2.0



Type A, M/M



Type A - B, M/M



Type A - mini B (5 pin), M/M



Type A - micro B, M/M

Type	Art. No.	EAN	Name	Length
USB 2.0	DB-300100-018-S	4016032283331	USB 2.0 connection cable, type A, M/M, USB 2.0 compatible, UL, bl	1,8 m
	DB-300102-018-S	4016032284833	USB 2.0 connection cable, type A - B, M/M, USB 2.0 compatible, UL, bl	1,8 m
	DB-300102-030-S	4016032383628	USB 2.0 connection cable, type A - B, M/M, USB 2.0 compatible, UL, bl	3,0 m
	DB-300105-050-S	4016032284239	USB 2.0 connection cable, type A - B, M/M, USB 2.0 conform, UL, bl	5,0 m
	DB-300115-018-S	4016032383703	USB 3.0 connection cable, type A - B, M/M, USB 3.0 conform, UL, bl	1,8 m
	DB-300127-010-S	4016032383673	USB 2.0 connection cable, type A - micro B, M/M, USB 2.0 compatible, UL, bl	1,0 m
	DB-300127-018-S	4016032383680	USB 2.0 connection cable, type A - micro B, M/M, USB 2.0 compatible, UL, bl	1,8 m
	DB-300130-010-S	4016032323235	USB 2.0 connection cable, type A - mini B (5pin), M/M, USB 2.0 conform, UL, bl	1,0 m
	DB-300130-018-S	4016032383666	USB 2.0 connection cable, type A - mini B (5pin), M/M, USB 2.0 conform, UL, bl	1,8m
	DB-300200-018-S	4016032284321	USB 2.0 extension cable, type A, M/F, USB 2.0 compatible, bl	1,8 m
	DB-300200-030-S	4016032284338	USB 2.0 extension cable, type A, M/F, USB 2.0 compatible, bl	3,0 m
	DB-300202-050-S	4016032285212	USB 2.0 extension cable, type A, M/F, USB 2.0 conform, UL, bl	5,0 m
	DB-300309-002-S	4016032383697	USB 2.0 adapter cable, OTG, type micro B - A, F/F/F, Super Speed, UL, bl	0,3 m

## USB 3.0



Type A - micro B, M/M



Type A, M/F



2x Type A-2x10pin IDC, F/F

Type	Art. No.	EAN	Name	Length
USB 3.0	DB-300140-003-S	4016032383758	USB 3.0 Y-adapter cable, type 2xA - A, M/M/F, Super Speed, UL, bl	0,3 m
	DB-300115-003-S	4016032383758	USB 3.0 Y-adapter cable, type 2xA - A, M/M/F, Super Speed, UL, bl	0,3 m
	DB-300203-018-S	4016032383727	USB 3.0 extension cable, type A, M/F, USB 3.0 conform, UL, bl	1,8 m
	DB-300300-003-S	4016032383765	USB 3.0 Y-adapter cable, 2x type A - 20-Pin IDC, F/F/F, Super Speed, UL, bl	0,3 m

**Euro-standart hole**

**Multilingual**

**Main Features**

**Blister**

## USB TYPE-C™



Type C - A, M/M



Type C - micro B, M/M



Type C - C, M/M



Type C - A, M/F

Type	Art. No.	EAN	Name	Length
<b>USB TYPE-C™</b>	DB-300136-010-S	4016032383772	USB Type-C connection cable, type C to A, M/M, Super Speed, UL, bl	1,0 m
	DB-300136-018-S	4016032383789	USB Type-C connection cable, type C to A, M/M, High-Speed, UL, bl	1,8 m
	DB-300137-010-S	4016032383796	USB Type-C connection cable, type C to micro B, M/M, Super Speed, UL, bl	1,0 m
	DB-300137-018-S	4016032383802	USB Type-C connection cable, type C to micro B, M/M, High-Speed, UL, bl	1,8 m
	DB-300138-010-S	4016032383819	USB Type-C connection cable, type C to C, M/M, High-Speed, UL, bl	1,0 m
	DB-300138-018-S	4016032383826	USB Type-C connection cable, type C to C, M/M, High-Speed, UL, bl	1,8 m
	DB-300316-001-S	4016032383833	USB Type-C adapter cable, type C - micro B, M/F, High-Speed, UL, bl	0,1 m

## PATCH CABLE



RJ45, M/M

Type	Art. No.	EAN	Name	Length
<b>PATCH CABLE</b>	DB-160144-010-S	4016032384038	Patch Cable, CAT6, RJ45, M/M, U-UTP, AWG 26/7, LSZH, bl	1,0 m
	DB-160144-020-S	4016032384045	Patch Cable, CAT6, RJ45 M/M, U-UTP, AWG 26/7, LSZH, bl	2,0 m
	DB-160144-030-S	4016032384052	Patch Cable, CAT6, RJ45, M/M, U-UTP, AWG 26/7, LSZH, bl	3,0 m

## POWER



CEE 7/7 (Type-F) - IEC C13, M/F

Type	Art. No.	EAN	Name	Length
<b>POWER</b>	DB-440109-018-S	4016032384120	Power Cord, CEE 7/7 (Type-F) 90° angled - C13, M/F, H05VV-F3G 0.75qmm, VDE, bl	1,8 m

## AUDIO



cinch stereo 3.5mm, M/M



cinch stereo 3.5mm, M/F



cinch stereo 3.5mm,  
2x RCA, M/M

Type	Art. No.	EAN	Name	Length
AUDIO	DB-510100-015-S	4016032384007	Audio connection cable, stereo 3.5mm, M/M, 2x0.10/10, bl	1,5 m
	DB-510200-015-S	4016032384014	Audio extension cable, stereo 3.5mm, M/F, 2x0.10/10, bl	1,5 m
	DB-510300-025-S	4016032384021	Audio connection cable, stereo 3.5mm - 2x RCA, M/M, 2x0.10/10, bl	2,5 m

## APPLE



Apple 8pin - USB A, M/M

Type	Art. No.	EAN	Name	Length
APPLE	DB-600106-005-W	4016032383901	Apple iP5/6 charger/data cable, Apple 8pin - USB A, M/M, High Speed, UL, MFI, wh	0,5 m
	DB-600106-010-W	4016032383932	Apple iP5/6 charger/data cable, Apple 8pin - USB A, M/M, High Speed, UL, MFI, wh	1,0 m



Premium Packaging



Viewing Window



Multilingual



Main Features



Icons







**MORE SECURITY SOLUTIONS IN OUR MAIN CATALOG, PAGES 42 - 67.**

### Das Plug&View System

Haben Sie alles stets im Blick, was Ihnen wichtig ist!  
So funktioniert DIGITUS® Plug&View

### The Plug&View system

Always keep an eye on what's important to you  
– this is how DIGITUS® Plug&View works

### Anwendungsgebiete

Die Anwendungsgebiete der Sicherheitskameras sind vielfältig: Das Konzept der Plug&View-Kameras erlaubt die visuelle und akustische Kommunikation mit der Familie, wenn Sie unterwegs sind. Dank der 2-Wege-Audiofunktion können Sie Ihr Baby oder Ihre Kinder beaufsichtigen oder nach Ihren alleine lebenden Großeltern schauen.

### Applications

The applications of security cameras are varied: The concept of the Plug&View cameras enables you to stay in touch with the family when you're out, visually and acoustically, thanks to a 2-way audio function, or to check up on babies and children, or to look after your grandparents who are living alone.

Kompatibel mit:  
Compatible with:



APP verfügbar unter:  
APP available on:



### Vorteile und Eigenschaften

Nutzen Sie mehrere Kameras mit nur einem System,  
jederzeit und überall.

### Advantages and details

Use several cameras with only one system,  
at all places and all times.



#### Einfache Installation

Durch Scannen des QR-Codes in nur drei Schritten via App

#### Easy installation

Using QR Code scanning in three steps



#### Gesicherte Videoübertragung

via VPN-Tunnel

#### Secured video transmission

via VPN tunnel



#### Höchste Sicherheit

durch Anmeldung per HTTPS

#### Highest safety

using HTTPS



#### Ereignisbenachrichtigung und -aufzeichnung

Sofortige Benachrichtigung auf Smartphone / Tablet

#### Event notification and event recording

Immediate event notification on smartphone / tablet



#### Kein Ereignis verpassen

Speicherung der Daten 5 Sek. vor und 25 Sek. nach dem Ereignis

#### Don't miss any event

Video storage 5 sec. before and 25 sec. after event



#### Cloud-Sicherung

Synchronisation der Videodaten auf Google Drive

#### Cloud Backup

Sync video to Google Drive




#### Automatische Firmware-Aktualisierung

per Smartphone/Tablet mit iOS und Android und per Webportal

#### Automatic firmware updates

for smartphone/tablet with iOS/Android and Web portal

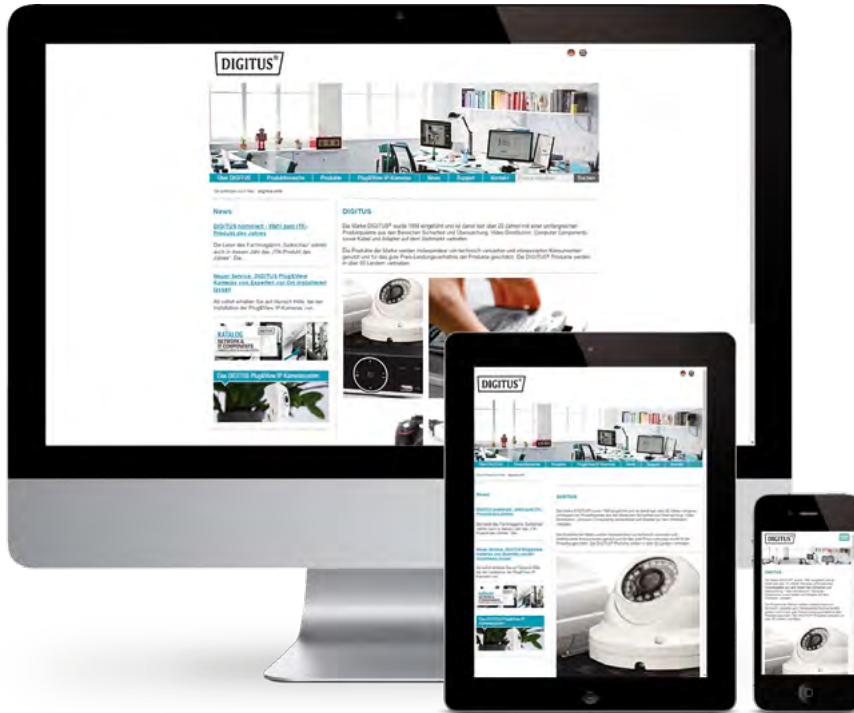

### Die neue DIGITUS® Webseite ist online

Verschaffen Sie sich einen Überblick zu unseren Produktbereichen Sicherheitslösungen (wie z.B. Plug&View), Präsentationslösungen, Computerkomponenten, Kabeln und Adaptern, u.v.m. und überzeugen Sie sich von unseren Lösungen aus einer Hand.





-  **Aktuelles Produktsortiment**
-  **Videos & Fotos**
-  **Datenblätter**
-  **Downloads**

**Überzeugen Sie sich selbst:**  
[www.digitus.info](http://www.digitus.info)



### The new DIGITUS® Website is online

Get an overall view about our product areas such as Security Solutions (like Plug&View), Presentation Solutions, Computer Components, Cables and Adapter, and convince yourself about our solutions from one hand.

-  **Current product range**
-  **Videos & images**
-  **Data sheets**
-  **Downloads**

**Just take a look at:**  
[www.digitus.info](http://www.digitus.info)



---

All brand names and logos that are mentioned are trademarks or registered trademarks of the respective owners. The right to make design-related variations from the photos, mistakes and technical changes is reserved. All information is provided without guarantee. We assume no liability for printing errors. The right to delivery is reserved and subject to availability. Published by ASSMANN Electronic GmbH, Auf dem Schüffel 3, 58513 Lüdenscheid - Germany. 12/2016

**DM-31030**